


Material & Finish:

- 1 Head: Stainless steel, Passivated
- 2 Handle: Aluminum, Oxidation
- 3 Spring: Manganese alloy
- 4 Steel ball: Stainless steel, Passivated
- 5 Spring pin: Stainless steel, Passivated
- 6 Other metal: Stainless steel, Passivated

Revisions			
Rev.	Description	Date	Approved
A	Initial release	01/15/15	J. Q
B	Outline drawing changed	05/15/15	J. Q
C	Outline drawing changed	08/22/18	J. Q
D	1-1/4 Added	10/18/23	J. Q

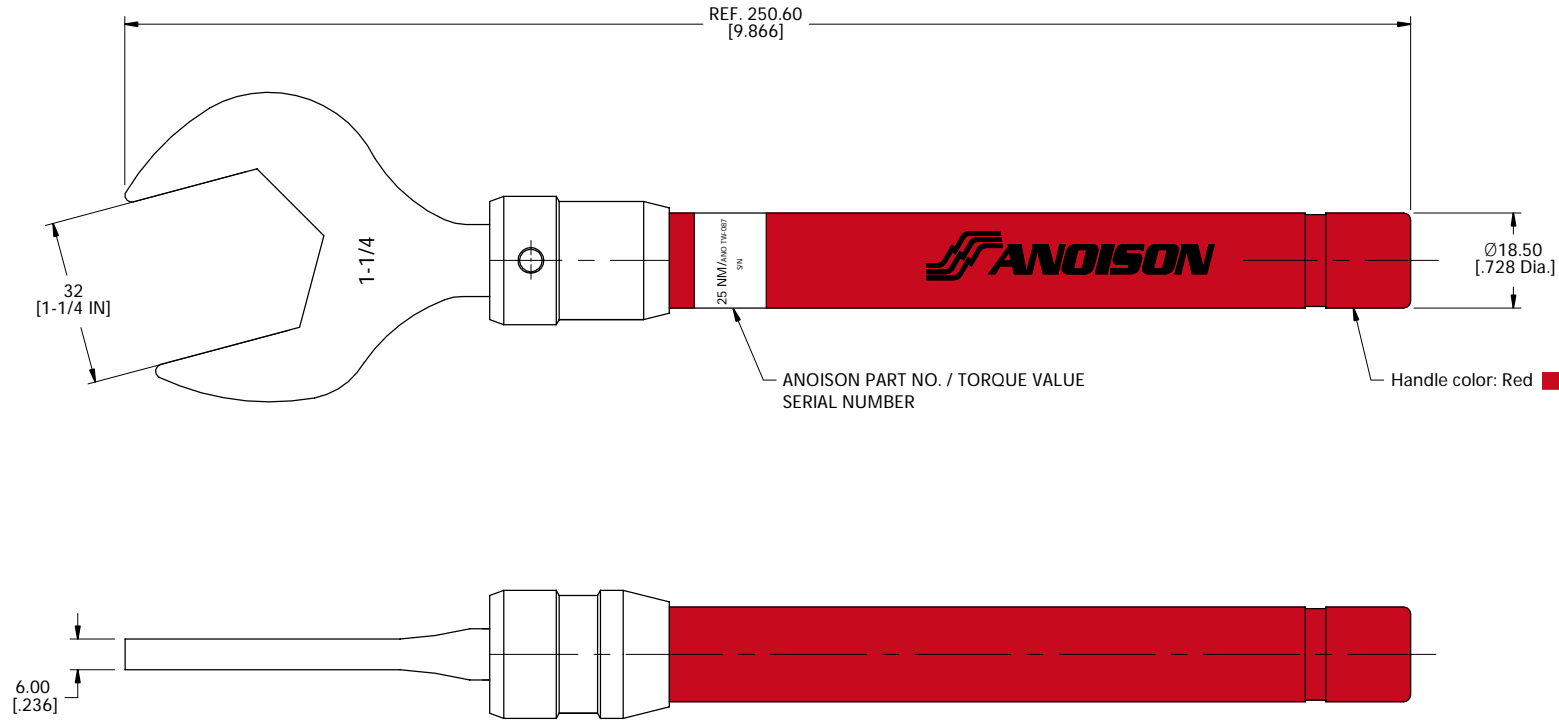

1. Torque value: 25±1 NM [221.25±8.85 in.lbs]
2. Size: 32 mm [1-1/4 in.]
3. Print content on handle(white color): ANOISON logo

Drawn	X. Y	Date	10/18/23													
Checked	W. Y	Date	10/18/23													
Approved	J. Q	Date	10/18/23													
<p>Unless otherwise specified dimensions are in millimeters, dimensions in [] are in inches for customer reference only unless otherwise specified tolerance are:</p> <table border="0"> <tr><td>.XX</td><td>±0.13 [.005"]</td></tr> <tr><td>.X</td><td>±0.20 [.008"]</td></tr> <tr><td>X</td><td>±0.50 [.019"]</td></tr> <tr><td>.X°</td><td>±1°</td></tr> <tr><td>X°</td><td>±2°</td></tr> </table>				.XX	±0.13 [.005"]	.X	±0.20 [.008"]	X	±0.50 [.019"]	.X°	±1°	X°	±2°	<p>These drawings and specifications are the property of anoisson group. they shall not be reproduced or used without written permission. 2026 anoisson group. all rights reserved.</p>		<p>Title</p> <p>Torque wrench, click for 7/16 type connectors preset torque= 25±1 NM [221.25±8.85 in.lbs] hex size 32 mm 1-1/4 in.]</p>
.XX	±0.13 [.005"]															
.X	±0.20 [.008"]															
X	±0.50 [.019"]															
.X°	±1°															
X°	±2°															
View		Part no.		<table border="1"> <tr> <td>ANO TW-087</td> </tr> </table>	ANO TW-087											
ANO TW-087																
		Size	Scale	Sheet	Rev.											
		A3	1:1	1/1	D											

Note: Specifications are subject to change without notice.
Contact us for the latest data before finalizing your design.