



Material & Finish:

- 1 Head: Stainless steel, Passivated
- 2 Handle: Aluminum, Oxidation
- 3 Spring: Manganese alloy
- 4 Steel ball: Stainless steel, Passivated
- 5 Spring pin: Stainless steel, Passivated
- 6 Other metal: Stainless steel, Passivated

Revisions

Rev.	Description	Date	Approved
A	Initial release	01/16/15	J. Q
B	202.70 [7.980] Was 196.90 [7.752]	01/22/15	J. Q
C	5±0.2 NM [44.25±1.77 in.lbs] was 5±0.25 NM [44.25±2.21 in.lbs]	02/09/17	J. Q
D	Torque value: [44.25±1.77 in.lbs] removed	02/11/17	J. Q
E	204.44 [8.049] was 206.39 [8.126]	08/03/21	J. Q
F	22mm added	10/17/23	J. Q

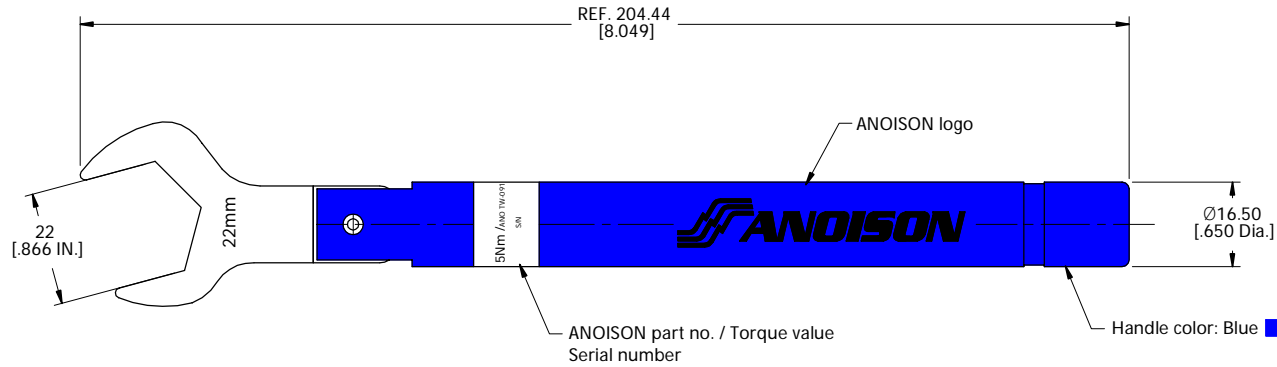

1. Torque value: 5±0.2 NM [44.25±1.77 in.lbs]
2. Size: 22 mm [.866 in.]
3. Print content on handle(white color): ANOISON logo

Drawn	X. Y	Date	10/17/23
Checked	W. Y	Date	10/17/23
Approved	J. Q	Date	10/17/23




Title
Torque wrench, break-over for 4.3-10 type connectors
preset torque= 5±0.2NM [44.25±1.77 in.lbs]
hex size 22 mm [.866 in.]

Note: Specifications are subject to change without notice.
Contact us for the latest data before finalizing your design.

Unless otherwise specified dimensions are in millimeters, dimensions in [] are in inches for customer reference only unless otherwise specified tolerance are:

.XX	±0.13 [.005"]
.X	±0.20 [.008"]
X	±0.50 [.019"]
.X°	±1°
X°	±2°

These drawings and specifications are the property of anoisson group. they shall not be reproduced or used without written permission. 2026 anoisson group. all rights reserved.



Part no. ANO TW-091			
Size A3	Scale 1:1	Sheet 1/1	Rev. F