
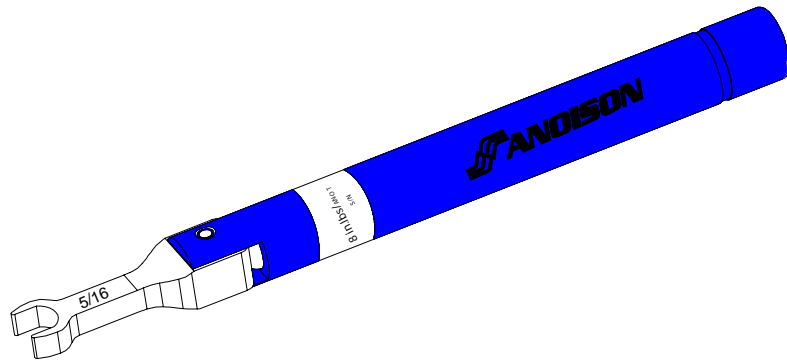


MATERIAL & FINISH:

- 1 HEAD: STAINLESS STEEL, PASSIVATED
- 2 HANDLE: ALUMINUM, OXIDATION
- 3 SPRING: MANGANESE ALLOY
- 4 STEEL BALL: STAINLESS STEEL, PASSIVATED
- 5 SPRING PIN: STAINLESS STEEL, PASSIVATED
- 6 OTHER METAL: STAINLESS STEEL, PASSIVATED

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	12/02/25	J. Q
B	5.00 [.20] WAS 6.50 [.26]	04/08/26	J. Q

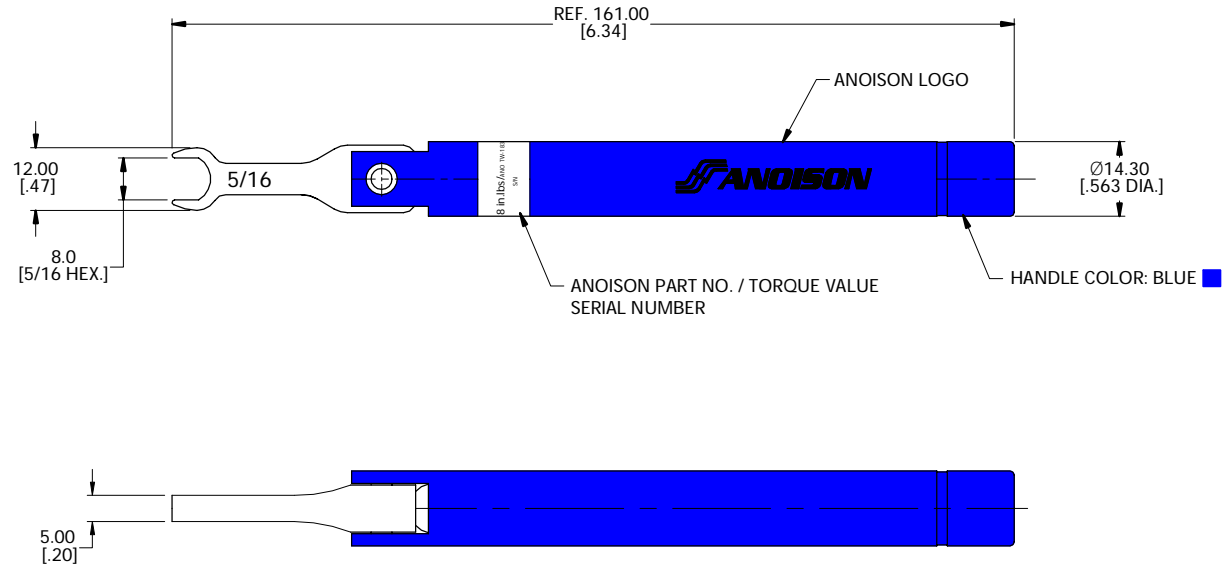

- 1. TORQUE VALUE: 0.9±0.04 NM [8±0.32 IN.LBS]
- 2. SIZE: 8 MM [5/16 IN.]
- 3. PRINT CONTENT ON HANDLE(WHITE COLOR)

DRAWN	X. Y	DATE	04/07/26
CHECKED	W. Y	DATE	04/07/26
APPROVED	J. Q	DATE	04/07/26
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON GROUP. THEY SHALL NOT BE REPRODUCED OR USED WITHOUT WRITTEN PERMISSION. © 2026 ANOISON GROUP. ALL RIGHTS RESERVED.	
XX	±0.13 [.005"]		
X	±0.20 [.008"]		
X	±0.50 [.019"]		
X°	±1°		
X°	±2°		

TITLE TORQUE WRENCH FOR HIGH DENSITY INSTALLATION SMA/3.5 MM/2.92 MM/2.4 MM/1.85 MM TYPE CONNECTORS PRESET TORQUE= 0.9±0.04 NM [8±0.32 IN.LBS] HEX SIZE 8 MM [5/16 IN.]			
VIEW		PART NO. ANO TW-183	
SIZE A3	SCALE 1:1	SHEET 1/1	REV. B