REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/11/22	J. QU

MATERIAL & FINISH:
SMA CONNECTOR:
1 BODY: BRASS, GOLD PLATED
2 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATED
3 INSULATOR: PEI

WR28:
1 CAVITY: BRASS, GOLD PLATED + PAINTING (BLACK)

ELECTRICAL DATA:
1 IMPEDANCE: 50 Ω
2 FREQUENCY RANGE: 26.5~40 GHz
3 VSWR: 1.25 MAX.
4 INSERTION LOSS: 0.3 DB MAX.

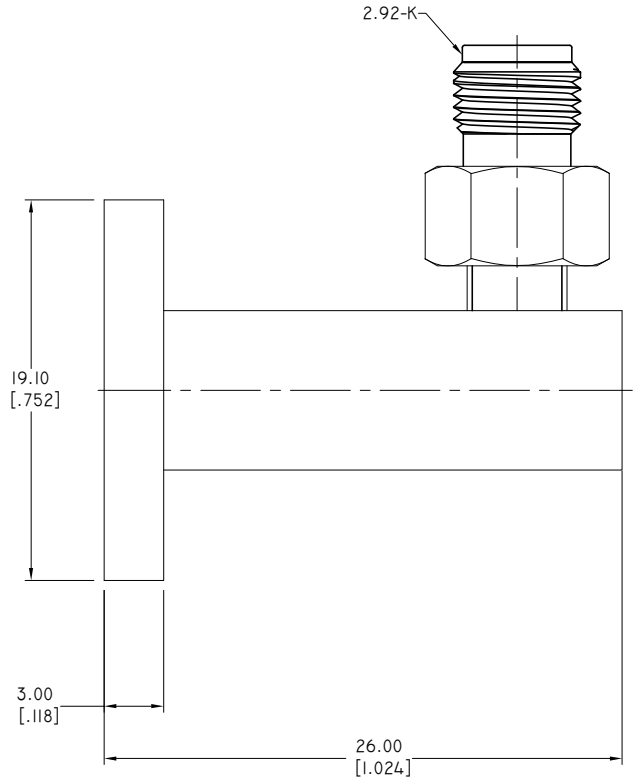

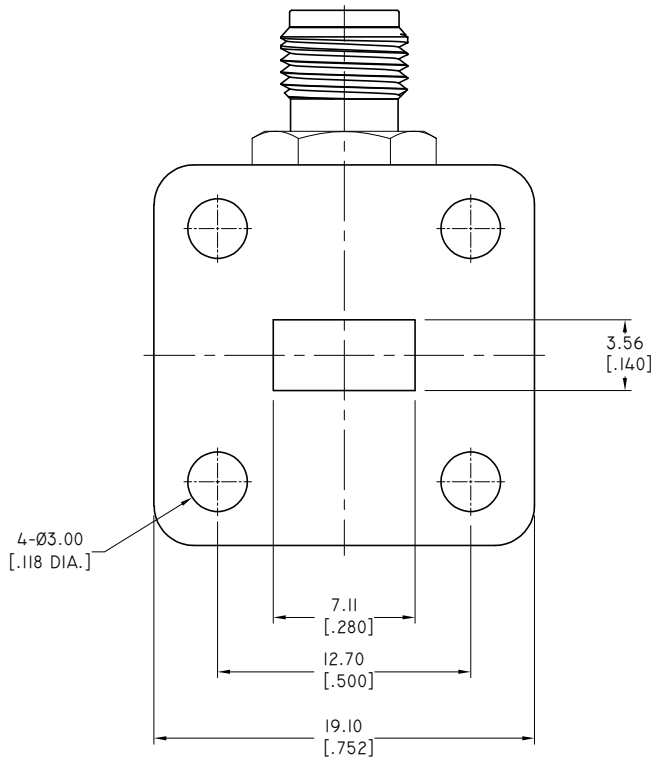

DRAWN	W. YANG	DATE 05/11/22
CHECKED	L. YANG	DATE 05/11/22
APPROVED	J. QU	DATE 05/11/22

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

.XX	±0.13 [.005"]
.X	±0.25 [.010"]
X	±0.50 [.019"]
.X°	±1°
X°	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2022 ANOISON ELECTRONICS LTD

ANOISON

TITLE
WR28 WAVEGUIDE TO COAXIAL 2.92MM RIGHT ANGLE ADAPTERS

VIEW

PART NO. ANO WR28-292-02

SIZE	SCALE	SHEET	REV.
A3	5:1	1/1	A