


ANO FLL335_LSZH

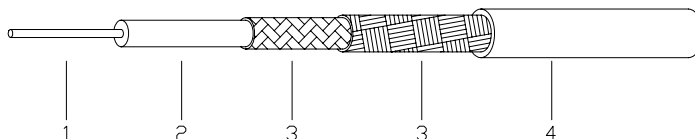

Construction Specification

	Material	Diameter(mm)
1.Inner Conductor	Silver Plated Copper	2.20
2.Dielectric	Physical Foam Polyethylene	6.20
3.Outer Conductor	Double Copper Braid	7.30
4.Jacket	LSZH Black PE	8.50

Electrical Characteristics

Capacitance(PF/m)	85.5
Impedance(ohm)	50
Max. Operating Voltage(kv)	2
Velocity(%)	80

Mechanical and Environmental Characteristics

Operating Temp(℃)	-40 to +80
Min. Bending Radius Static(mm)	42
Min. Bending Radius Repeated(mm)	64

Attenuation & Average Power @ 20℃ and Seal Level

Frequency(MHz)	Attenuation(dB/m)
500	0.14
1000	0.21
2000	0.32
2500	0.38