


ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~3 GHZ
- 3 VSWR: 1.45 MAX. AT DC~3 GHZ
- 4 INSERTION LOSS: 1.2DB MAX. AT DC~3 GHZ

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/24/17	J. QU

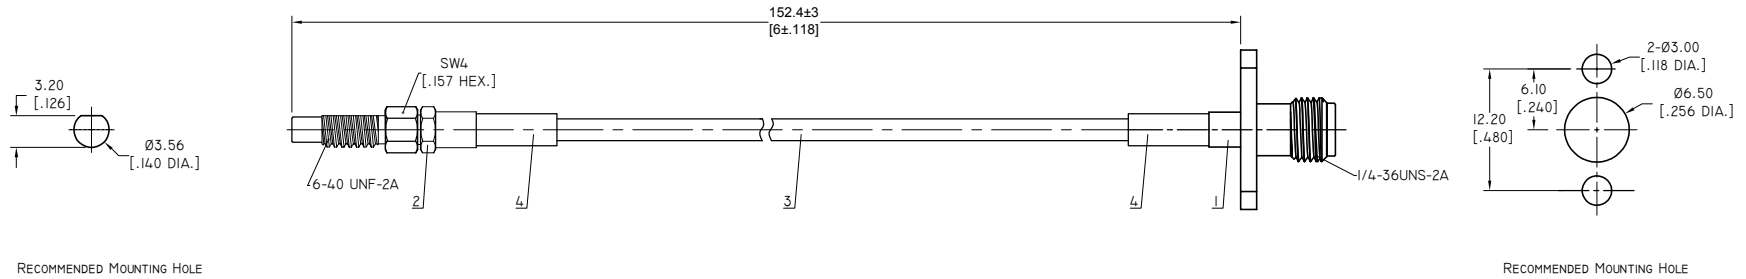

RECOMMENDED MOUNTING HOLE

RECOMMENDED MOUNTING HOLE

SEQUENCE NUMBER	PART NO.	DESCRIPTION	QTY
4	ANO 8.687.104	HEAT-SHRINK TUBING Ø2.5X15	2
3	ANO HF086FEP	ANO HF086FEP CABLE	1
2	ANO 4811-2006	SSMC BULKHEAD STRAIGHT MALE FOR RG405 CABLE	1
1	ANO 2112-2044	SMA STRAIGHT FEMALE FLANGE, 2 HOLE FOR .086 CABLE	1

DRAWN	DATE	
W. YANG	05/24/17	
CHECKED	DATE	
L. YANG	05/24/17	TITLE CABLE ASSEMBLY, PANEL MOUNT SMA STRAIGHT FEMALE TO SSMC BULKHEAD STRAIGHT MALE, RG405 CABLE
APPROVED	DATE	
J. QU	05/24/17	VIEW
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] X° ±1° X° ±2°		PART NO. HF086FEP-SMAF-SSMCM-6
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2016 ANOISON ELECTRONICS LTD		SIZE A3 SCALE 2:1 SHEET 1/1 REV. A