


**ELECTRICAL DATA:**

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC~6 GHZ
- 3 VSWR:  $\leq 1.40$  AT DC~2.5GHZ  
 $\leq 1.60$  AT 2.5~6GHZ
- 4 INSERTION LOSS:  $\leq 2.70$  DB AT DC~2.5 GHZ  
 $\leq 3.80$  DB AT 2.5~6 GHZ

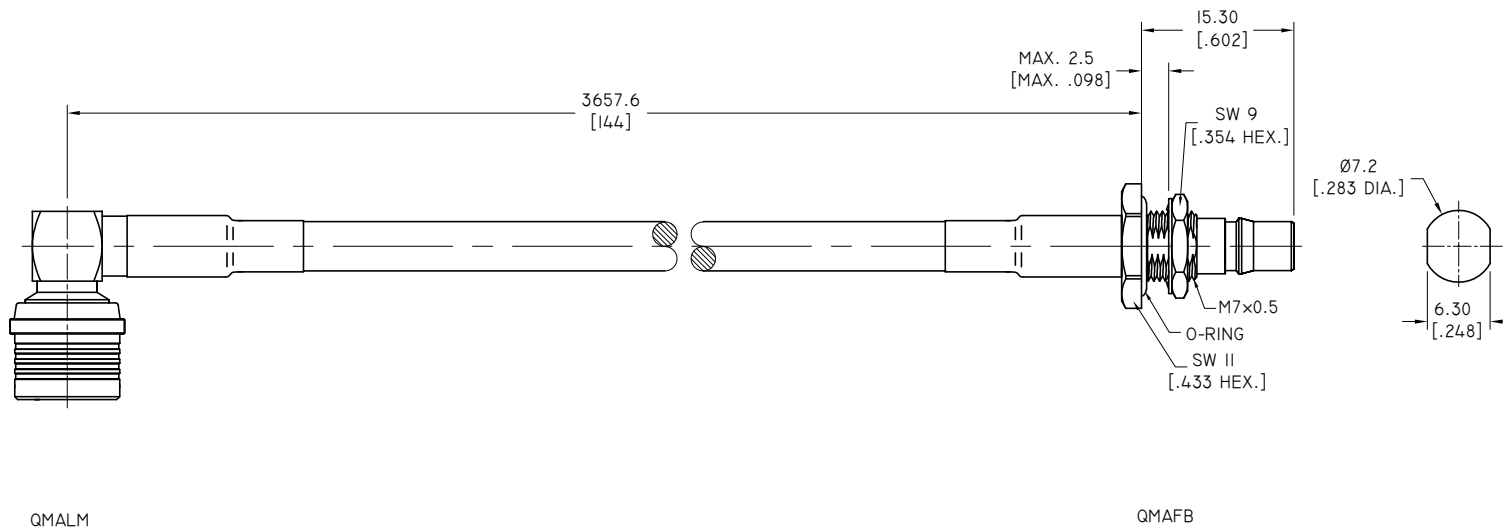

TITLE  
CABLE ASSEMBLY, QMA R/A MALE TO QMA STRAIGHT  
WTATERPROOF BULKHEAD FEMALE, LLI95 CABLE,  
144 INCHS

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGED WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN MILLINETERS, DIMENSIONS IN [ ] ARE IN INCHES  
4. LENGTH TOLERANCE IS  $\pm 1.5\%$ .

VIEW		PART NO.			
		LLI95-QMALM-QMAFB-12FT			
SIZE	SCALE	SHEET	REV.		
A3	2:1	1/1	A		