


ELECTRICAL DATA:

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC~6 GHZ
- 3 VSWR: ≤ 1.30 AT DC~3GHZ
 ≤ 1.50 AT 3~6GHZ
- 4 INSERTION LOSS: ≤ 1.50 DB AT DC~3 GHZ
 ≤ 2.00 DB AT 3~6 GHZ

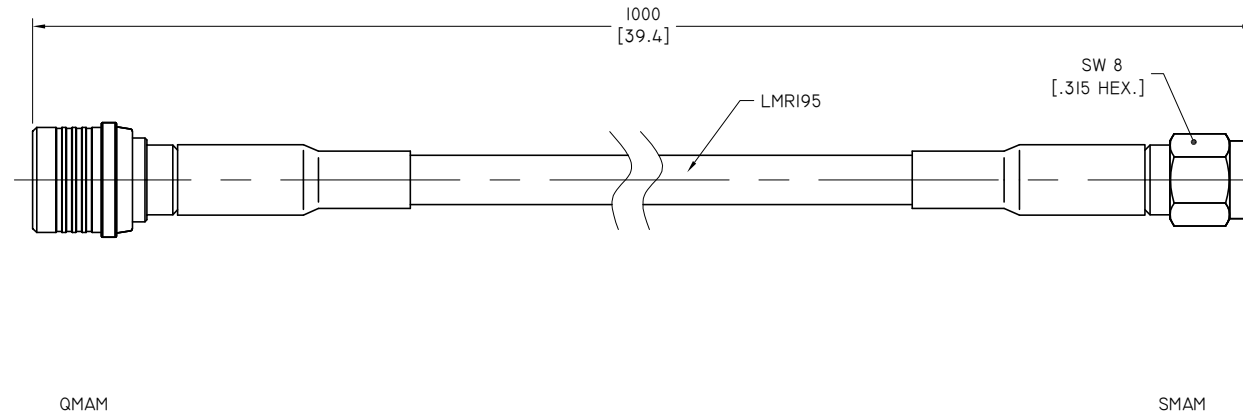

TITLE
CABLE ASSEMBLY, QMA STRAIGHT MALE TO SMA STRAIGHT MALE LLI95 CABLE, 1 METERS

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGED WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES
4. LENGTH TOLERANCE IS $\pm 1.5\%$.

VIEW



PART NO.

LLI95-QMAM-SMAM-1M

SIZE
A3

SCALE
2:1

SHEET
1/1

REV.
A