

4

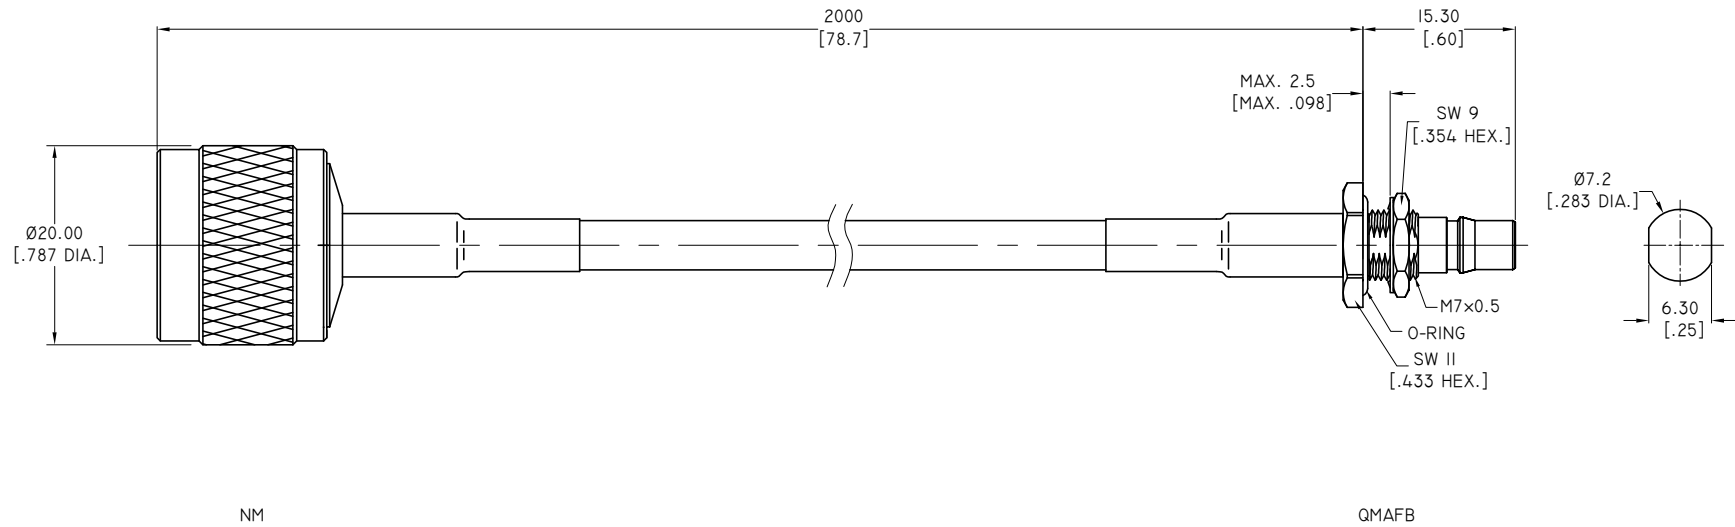
3

2

1



ELECTRICAL DATA:

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC~5.8GHZ
- 3 VSWR: 1.30 MAX. AT DC~3GHZ
1.50 MAX. AT 3~5.8GHZ
- 4 INSERTION LOSS: 1.70 DB TYP. AT DC~3GHZ
2.75 DB TYP. AT 3~5.8GHZ



TITLE
 CABLE ASSEMBLY, N STRAIGHT MALE TO QMA STRAIGHT
 WATERPROOF BULKHEAD FEMALE, LL200 CABLE, 2
 METERS

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGED WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN MILLINMETERS, DIMENSIONS IN [] ARE IN INCHES
 4. LENGTH TOLERANCE IS ±1.5%.

VIEW	PART NO.		
 	LL200-NM-QMAFB-2M		
SIZE	SCALE	SHEET	REV.
A3	2:1	1/1	A

4

3

2

1