

4

3

2

1

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC-6GHZ
- 3 VSWR: 1.35 MAX.
- 4 INSERTION LOSS: 18.0 DB MAX.

D

D

C


C

B

B

A

A

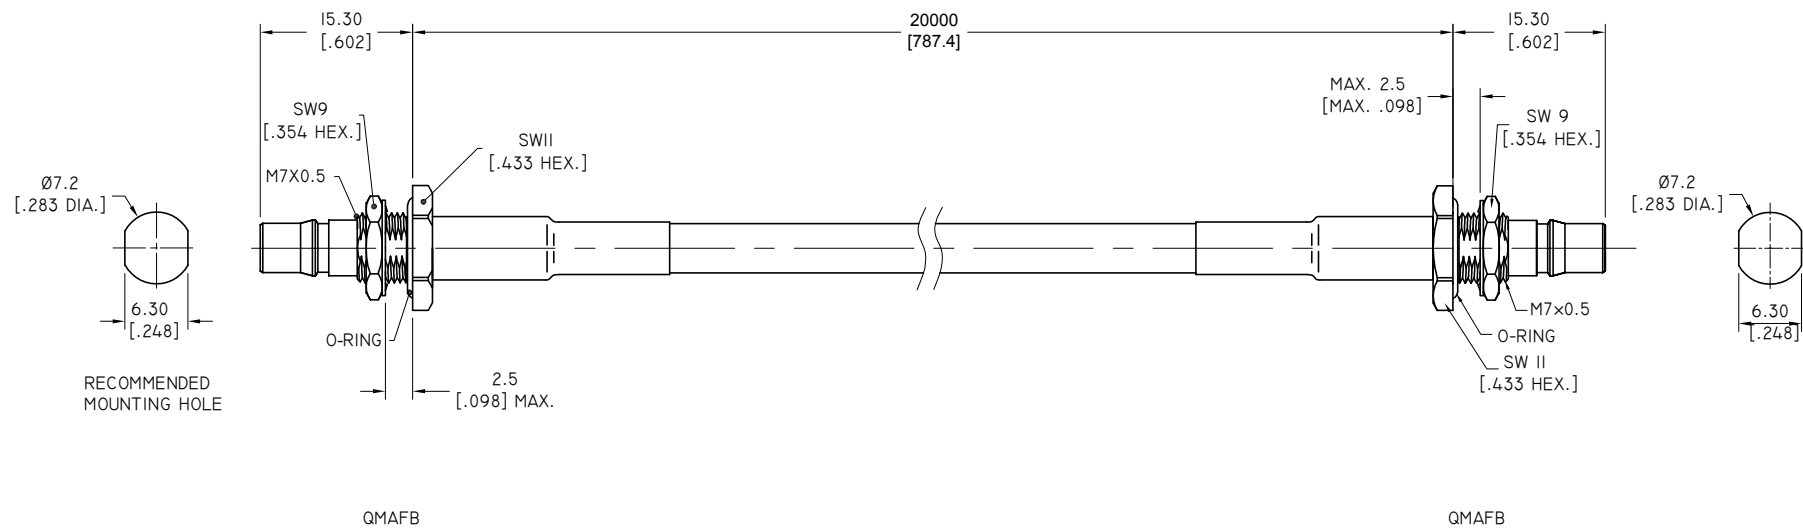

TITLE
CABLE ASSEMBLY, QMA STRAIGHT WATERPROOF BULKHEAD FEMALE TO QMA STRAIGHT WATERPROOF BULKHEAD FEMALE, LL200 CABLE, 20 METERS

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGED WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES
 4. LENGTH TOLERANCE IS ±1.5%.

VIEW 	PART NO. LL200-QMAFB-QMAFB-20M			
	SIZE A3	SCALE 2:1	SHEET 1/1	REV. A

4

3

2

1