

4


3

2

1

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC~6 GHZ
- 3 VSWR: 1.30 MAX. AT DC~3GHZ
1.50 MAX. AT 3~6GHZ
- 4 INSERTION LOSS: 1.25 DB MAX. AT DC~3GHZ
2.05 DB MAX. AT 3~6GHZ

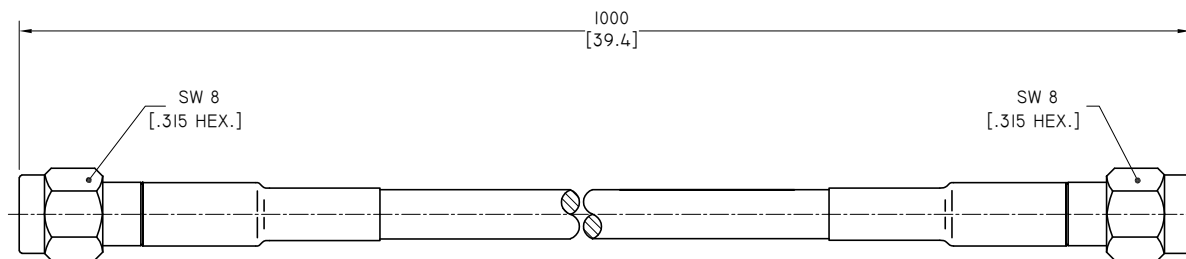

SMAM


SMAM



TITLE
CABLE ASSEMBLY, SMA STRAIGHT MALE TO SMA STRAIGHT MALE, LL200 CABLE, 1 METERS

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGED WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES
4. LENGTH TOLERANCE IS ±1.5%.

VIEW



PART NO.

LL200-SMAM-SMAM-IM

SIZE
A3

SCALE
2:1

SHEET
1/1

REV.
A

4

3

2

1

D

C

B

A

D

C

B

A