


ELECTRICAL DATA:

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC-6 GHZ
- 3 VSWR: 1.30 MAX. AT DC-3 GHZ
1.50 MAX. AT 3-6 GHZ
- 4 INSERTION LOSS: 1.85 MAX. AT DC-3 GHZ
3.00 MAX. AT 3-6 GHZ

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	08/12/19	J. QU

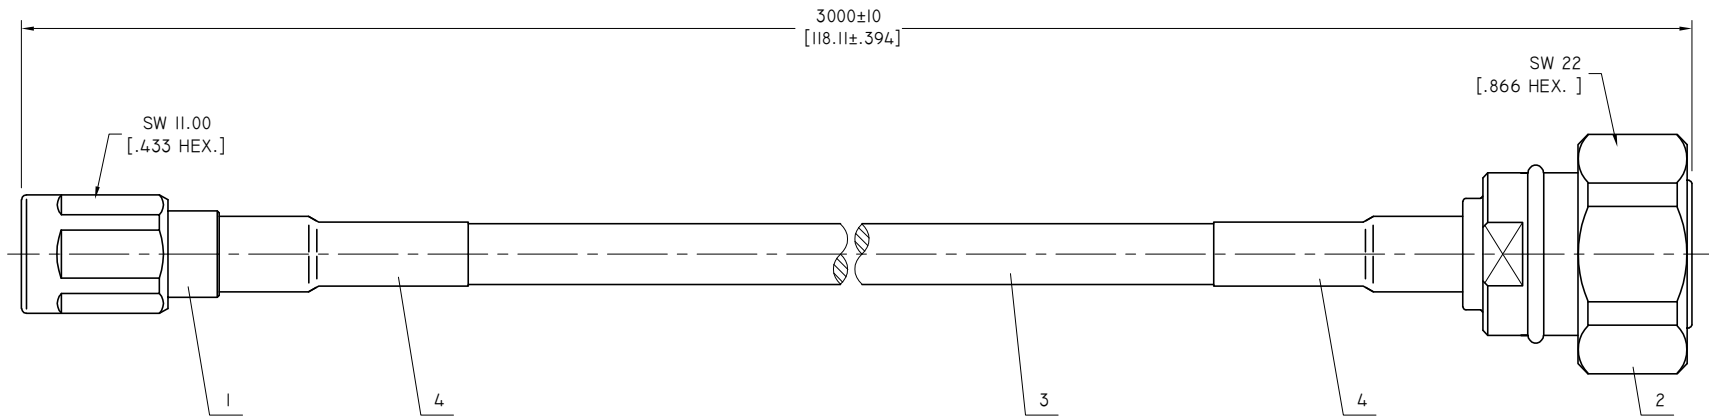

SEQUENCE NUMBER	PART NO.	DESCRIPTION	QTY
4	ANO 8.687.103	HEAT-SHRINKABLE TUBE	2
3	ANO LL-240	ANO LL-240 CABLE(LMR-240 EQUIVALENT)	1
2	ANO 4711-2022	SCREW 4.3-10 STRAIGHT MALE CRIMP FOR ANO LL-240 CABLE	1
1	ANO 7411-2007	M10(NEX10) STRAIGHT MALE CRIMP FOR ANO LL-240 CABLE	1

DRAWN	X. B. YANG	DATE	08/12/19
CHECKED	W. YANG	DATE	08/12/19
APPROVED	J. QU	DATE	08/12/19
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2019 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
X*	±1°		
X*	±2°		



TITLE
CABLE ASSEMBLY, M10(NEX10) STRAIGHT MALE TO SCREW 4.3-10 STRAIGHT MALE, ANO LL-240 CABLE, 3 METERS

VIEW	PART NO. LL240-M10M-4310M-3M	SIZE A3	SCALE 5:1	SHEET 1/1	REV. A
------	---------------------------------	------------	--------------	--------------	-----------