

4

3

2

1

**ELECTRICAL DATA:**

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC~6 GHz
- 3 VSWR: 1.20 MAX. DC~3GHz  
1.30 MAX. 3~6GHz
- 4 INSERTION LOSS: ≤0.70 DB AT DC~3GHz  
≤0.80 DB AT 3~6GHz

D

D

C


C

B

B

A

A

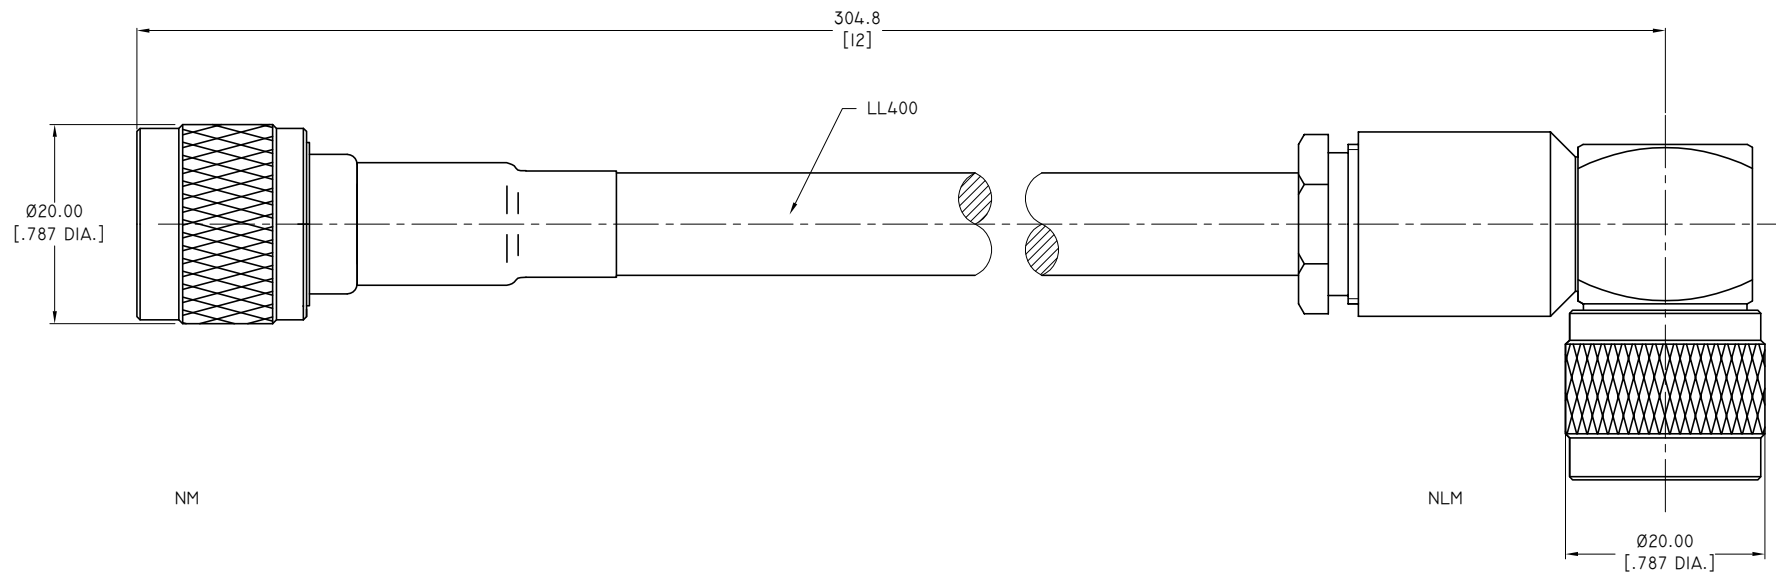

TITLE  
 CABLE ASSEMBLY, N STRAIGHT MALE TO N R/A MALE, LL400 CABLE, 12 INCHS

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGED WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES  
 4. LENGTH TOLERANCE IS ±1.5%.

VIEW	PART NO. LL400-NM-NLM-IFT		
	SIZE A3	SCALE 2:1	SHEET 1/1
			REV. A

4

3

2

1