ELECTRICAL DATA:

1 IMPEDANCE: 50 OHMS
2 FREQUENCY RANGE: DC~5.8 GHz
3 VSWR: 1.30 MAX. DC~3GHz
1.50 MAX. 3~5.8GHz
4 INSERTION LOSS: ≤5.35 DB AT DC~3GHz
≤8.10 DB AT 3~5.8GHz

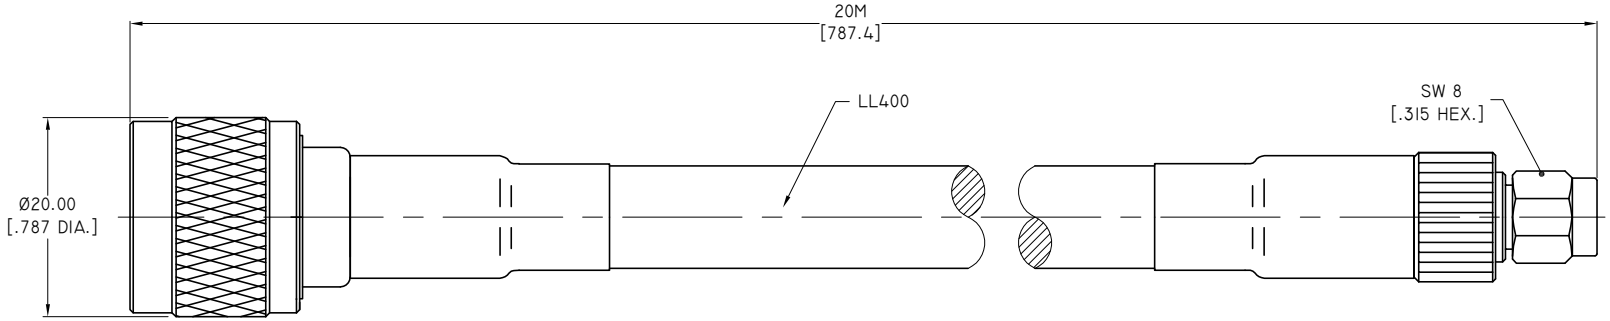

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGED WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN MILLINMETERS, DIMENSIONS IN [ ] ARE IN INCHES
4. LENGTH TOLERANCE IS ±1.5%.

ANOISON

TITLE
CABLE ASSEMBLY, N STRAIGHT MALE TO SMA STRAIGHT MALE, LL400 CABLE, 20 METERS

VIEW

PART NO.
LL400-NM-SMAM-20M

SIZE	SCALE	SHEET	REV.
A3	2:1	1/1	A