


ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 WITHSTAND VOLTAGE: 2000 V MAX.
- 3 FREQUENCY RANGE: DC~6 GHZ
- 4 VSWR: 1.25 MAX. AT DC~3GHZ
1.35 MAX. AT 3~6 GHZ
- 5 INSERTION LOSS: 0.4 DB MAX. AT DC~3 GHZ
0.5 DB MAX. AT 3~6 GHZ

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/13/15	J. QU

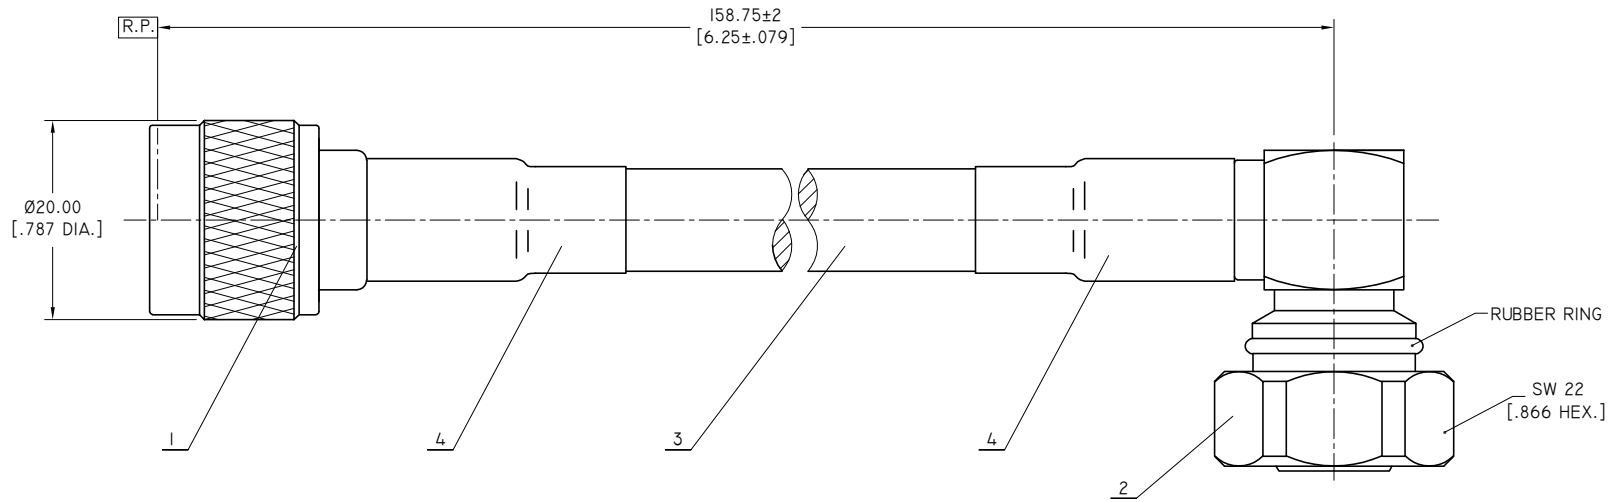

SEQUENCE NUMBER	PART NO.	DESCRIPTION	QTY
4	ANO 8.687.105	HEAT-SHRINK TUBING	2
3	ANO LL400-LITE	ANO LL400-LITE CABLE	1
2	ANO 4621-2001	4.1-9.5 RIGHT ANGLE MALE CRIMP FOR LMR400 CABLE	1
1	ANO 5111-2047	N STRAIGHT MALE CRIMP FOR LMR400 CABLE	1

DRAWN	P. CHEN	DATE	11/13/15
CHECKED	L. YANG	DATE	11/13/15
APPROVED	J. QU	DATE	11/13/15
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2015 ANOISON ELECTRONICS LTD	
.XX	±0.13 [0.005"]		
.X	±0.20 [0.008"]		
X°	±0.50 [0.019"]		
X°	±1°		
X°	±2°		

ANOISON

TITLE
CABLE ASSEMBLY, N STRAIGHT MALE TO 4.1-9.5 RIGHT ANGLE MALE, ANO LL400-LITE CABLE, 6.25IN.

VIEW:

PART NO.
LL400LITE-NM-4I95LM-6.25

SIZE	SCALE	SHEET	REV.
A3	2:1	1/1	A