


ELECTRICAL DATA:

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC~3 GHz
- 3 VSWR: 1.60 MAX.
- 4 INSERTION LOSS: 2.6 DB MAX.

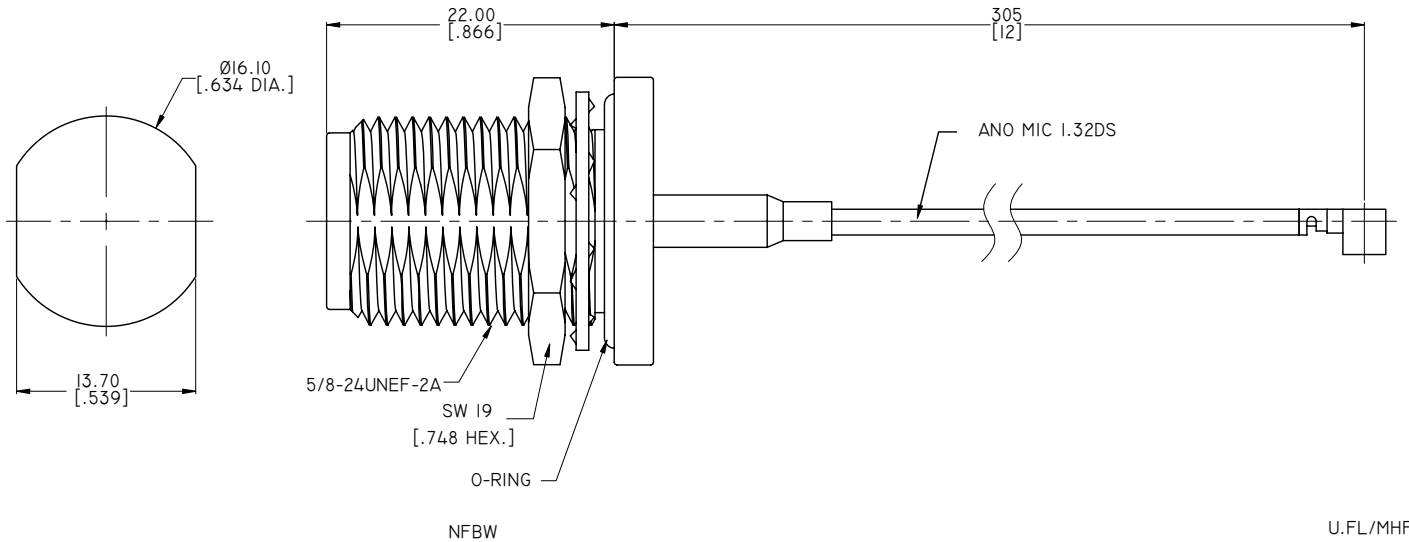

TITLE
 CABLE ASSEMBLY, N STRIGHT WATERPROOF
 BULKHEAD FEMALE TO U.FL/MHF R/A PLUG, ANO
 MIC 1.32DS (DOUBLE SHIELDED) CABLE, 12 INCHS

- NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGED WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES
 4. LENGTH TOLERANCE IS $\pm 1.5\%$.

VIEW	PART NO.		
	MIC132DS-NFBW-UFL-12		
SIZE	SCALE	SHEET	REV.
A3	2.5:1	1/1	A