


**ELECTRICAL DATA:**


- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~40 GHz
- 3 RETURN LOSS: -20 dB MAX. AT DC~6 GHz  
-16 dB MAX. AT 6 GHz~40GHz
- 4 INSERTION LOSS: -0.5 dB MIN. AT DC~6 GHz  
-1 dB MIN. AT 6~20 GHz  
-2 dB MIN. AT 20~40 GHz

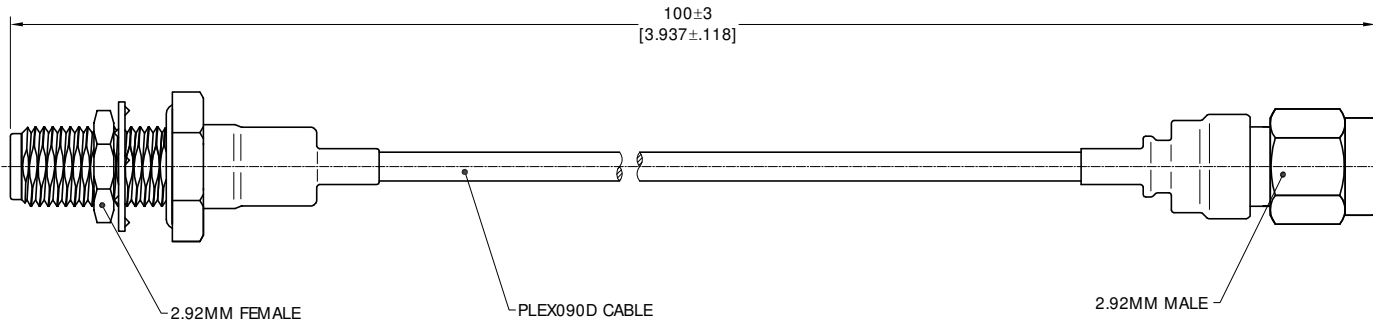

TITLE  
CABLE ASSEMBLY, 2.92MM STRAIGHT BULKHEAD FEMALE  
TO 2.92MM STRAIGHT MALE, PLEX090D CABLE, 100MM

- NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGED WITHOUT NOTICE AT ANY TIME  
3. DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES  
4. LENGTH TOLERANCE IS ±2%.

VIEW



PART NO.

P090D-29FB-29M-100MM

SIZE  
A3

SCALE  
2.5:1

SHEET  
1/1

REV.  
A