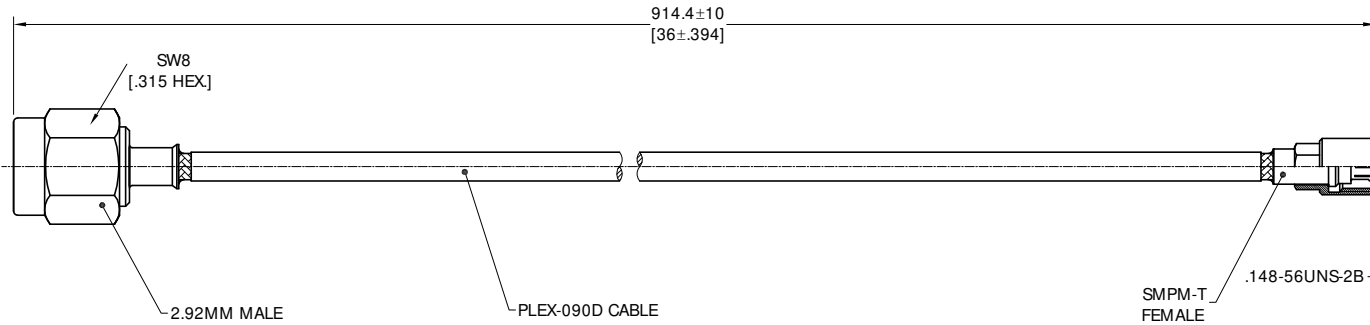




**ELECTRICAL DATA:**

- 1. IMPEDANCE: 50 Ω
- 2. FREQUENCY RANGE: DC~40 GHz
- 3. VSWR: 1.40 MAX
- 4. INSERTION LOSS: 4.70DB MAX



TITLE  
CABLE ASSEMBLY, 2.92MM STRAIGHT MALE TO SMPM-T STRAIGHT FEMALE, PLEX-090D CABLE, 36 INCHES

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGED WITHOUT NOTICE AT ANY TIME  
3. DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES  
4. LENGTH TOLERANCE IS ±2%.

VIEW	PART NO. P090D-29M-SMPMTF-36			
 	SIZE A3	SCALE 2.5:1	SHEET 1/1	REV. A