

MATERIAL & FINISH:

1. BODY: STAINLESS STEEL, PASSIVATED
2. CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
3. INSULATOR: PEI


ENVIRONMENTAL DATA:

1. TEMPERATURE RANGE: -55°C~+125°C
2. 2011/65/EU (RoHS): COMPLIANT

ELECTRICAL SPECIFICATIONS:

1. IMPEDANCE: 50 Ω
2. FREQUENCY RANGE: DC~40GHZ
3. VSWR: 1.20 MAX

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/29/15	J. QU

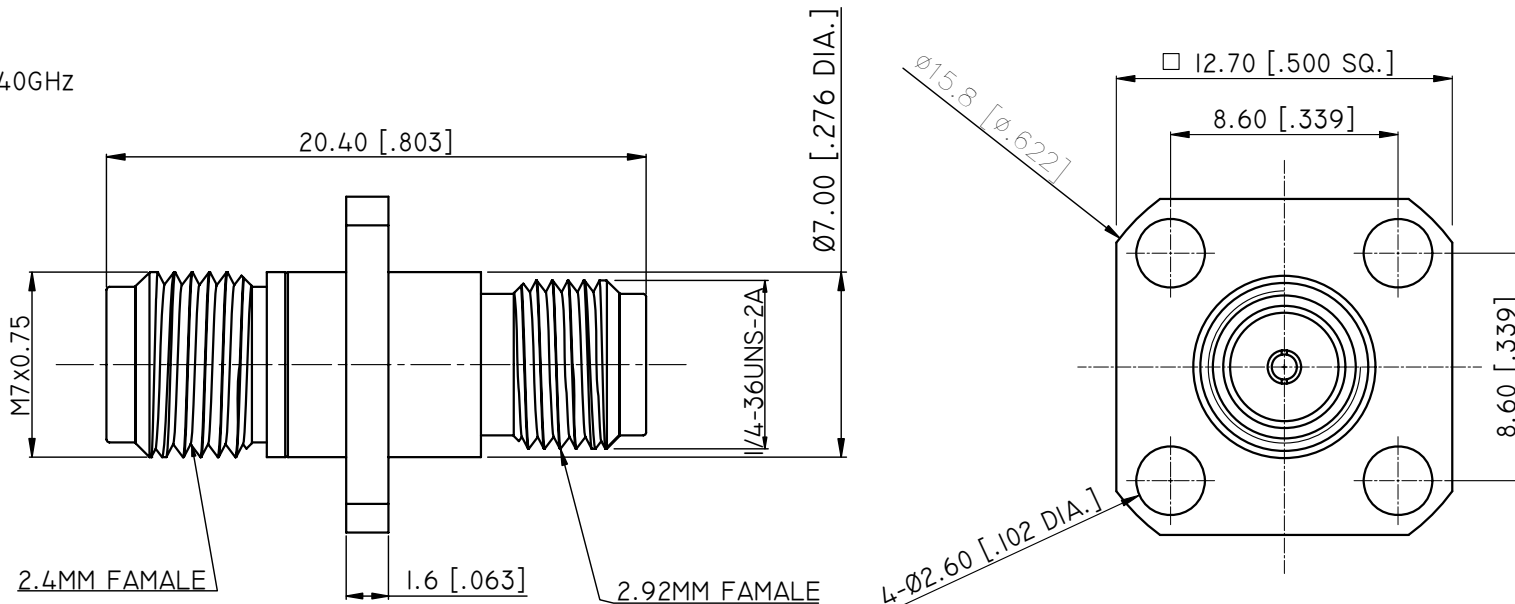

DRAWN	X. B. YANG	DATE	05/29/15	
CHECKED	L. YANG	DATE	05/29/15	
APPROVED	J. QU	DATE	05/29/15	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED		TOLERANCE ARE:		TITLE PRECISION ADAPTER 2.4MM FEMALE TO 2.92MM FEMALE 4 HOLE FLANGE
.XX	±0.13 [0.005"]	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
.X	±0.20 [0.008"]	COPYRIGHT © 2015 ANOISON ELECTRONICS LTD		VIEW
X	±0.50 [0.019"]	PART NO.		PA2229F
.X°	±1°	SIZE		A3
X°	±2°	SCALE		5:1
		SHEET		1/1
		REV.		A