

**MATERIAL & FINISH:**

1. BODY: STAINLESS STEEL, PASSIVATED
2. CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
3. INSULATOR: MPP0&PEI


**ENVIRONMENTAL DATA:**

1. TEMPERATURE RANGE: -55°C~+125°C
2. 2002/95/EC (RoHS): COMPLIANT

**ELECTRICAL SPECIFICATIONS:**

1. IMPEDANCE: 50 Ω
2. FREQUENCY RANGE: DC~27GHZ
3. VSWR: 1.15 MAX

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/10/15	J. QU

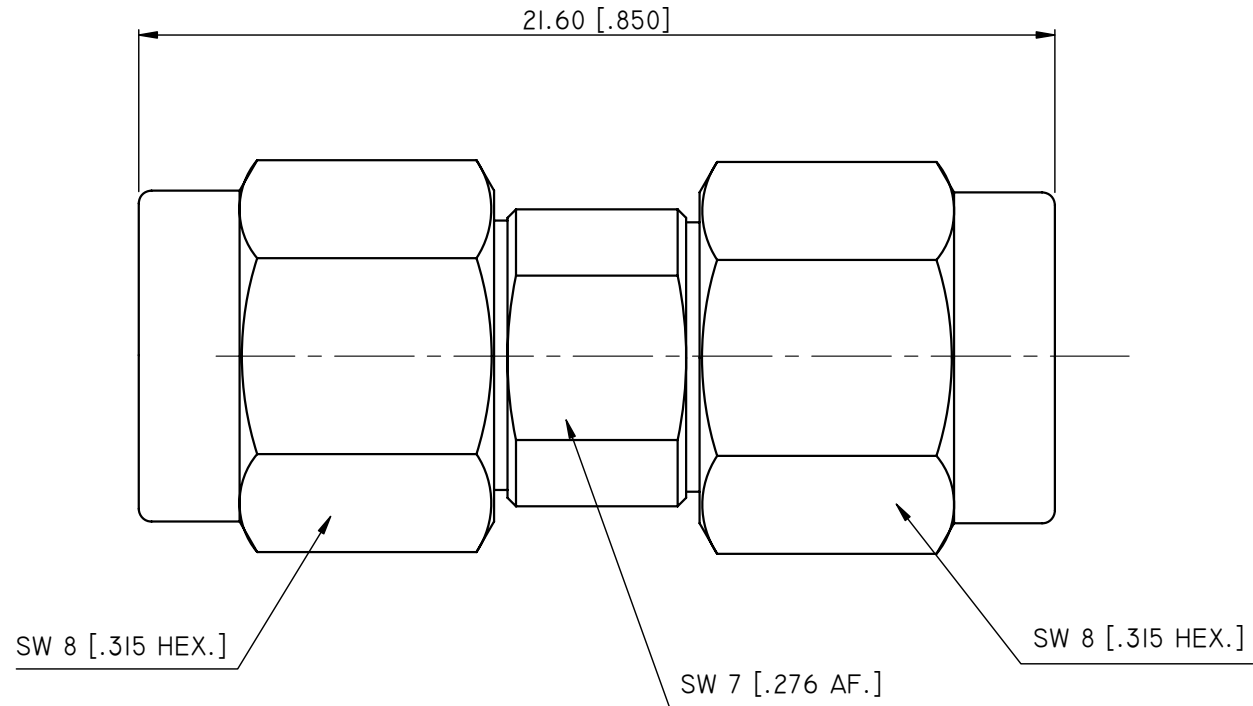

DRAWN	L. YANG	DATE	06/01/15		
CHECKED	X. B. YANG	DATE	06/01/15		
APPROVED	J. QU	DATE	06/01/15		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2015 ANOISON			
.XX ±0.13 [.005"]					
.X ±0.20 [.008"]					
X ±0.50 [.019"]					
.X° ±1°					
X° ±2°					
			TITLE		
			PRECISION ADAPTER SMA MALE TO 2.92MM MALE		
VIEW			PART NO. PA2921A		
SIZE A3		SCALE 8:1		SHEET 1/1	REV. A