

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	01/30/13	J. Q
B	PART NO. CHANGED	05/27/15	J. Q
C	SW5.5 [.312 AF.] WAS SW6.0 [.236 AF.]	12/06/16	J. Q
D	BODY & COUPLING NUT MATERIAL & FINISH CHANGED TO STAINLESS STEEL, PASSIVATED	06/06/18	J. Q
E	INSERTION LOSS ADDED	12/20/22	J. Q

MATERIAL & FINISH:


- 1 BODY: STAINLESS STEEL, PASSIVATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 COUPLING NUT: STAINLESS STEEL, PASSIVATED
- 4 INSULATOR: PEI

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~40 GHZ
- 3 VSWR 1.15 MAX.
- 4 INSERTION LOSS: 0.2 DB MAX.

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU (RoHS): COMPLIANT

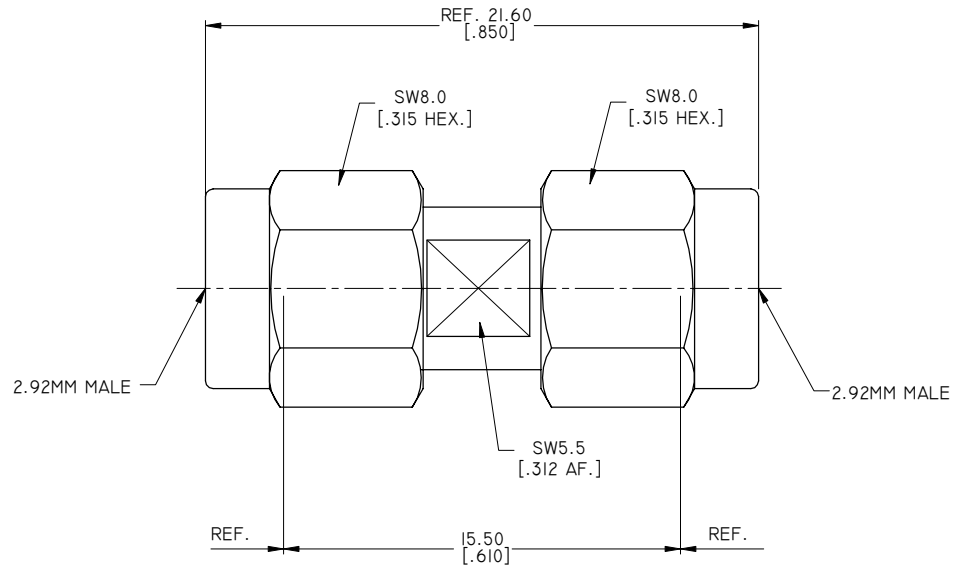

DRAWN	X. Y	DATE	12/20/22
CHECKED	W. Y	DATE	12/20/22
APPROVED	J. Q	DATE	12/20/22
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		8THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2022 ANOISON ELECTRONICS LTD	
	.XX	±0.13	[.005"]
	.X	±0.20	[.008"]
	X	±0.50	[.019"]
	.X°	±1°	
	X°	±2°	



TITLE			
PRECISION ADAPTER, 2.92MM MALE TO 2.92MM MALE			
VIEW	PART NO.		
	PA2929A		
SIZE	SCALE	SHEET	REV.
A3	5:1	1/1	E