

4

3

2

1

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	01/30/13	J. Q
B	PART NO. CHANGED	05/27/15	J. Q
C	CHANGED ELECTRICAL SPECIFICATIONS	11/09/16	J. Q
D	INSERTION LOSS CHANGED TO 0.2 DB MAX.	12/20/22	J. Q

MATERIAL & FINISH:


- 1. BODY: STAINLESS STEEL, PASSIVATED
- 2. CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3. COUPLING NUT: STAINLESS STEEL, PASSIVATED
- 4. INSULATOR: PEI

ENVIRONMENTAL DATA:

- 1. TEMPERATURE RANGE: -55°C~+125°C
- 2. 2011/65/EU (RoHS): COMPLIANT

ELECTRICAL SPECIFICATIONS:

- 1. IMPEDANCE: 50 Ω
- 2. FREQUENCY RANGE: DC~4.0GHZ
- 3. VSWR: ≤1.15
- 4. INSERTION LOSS: 0.2 DB MAX.

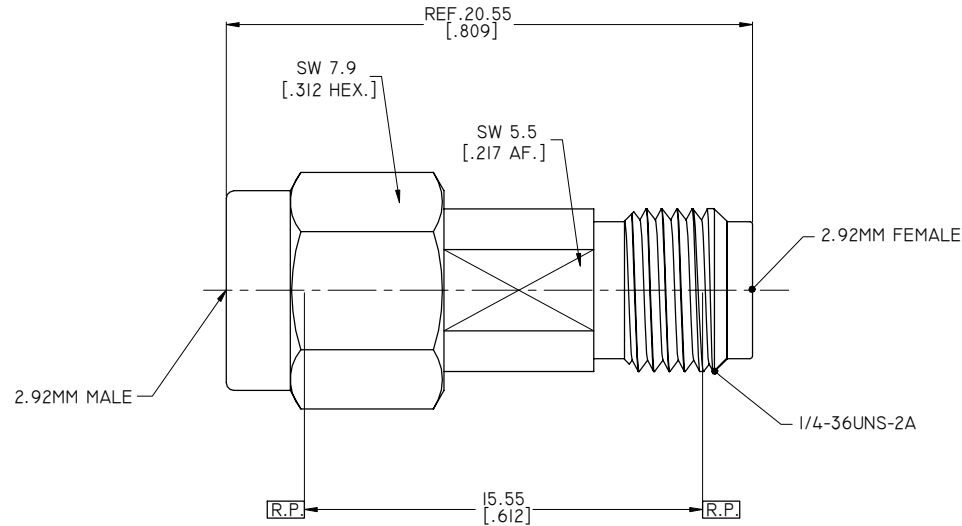

DRAWN	X. Y	DATE	12/20/22
CHECKED	W. Y	DATE	12/20/22
APPROVED	J. Q	DATE	12/20/22
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2016 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE PRECISION ADAPTER 2.92MM MALE TO 2.92MM FEMALE			
VIEW	PART NO. PA2929B		
	SIZE A3	SCALE 5:1	SHEET 1/1
			REV. D

4

3

2

1