

4

3

2

1

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
C	CHANGED ELECTRICAL SPECIFICATIONS	11/09/16	J. QU
D	CHANGED ELECTRICAL SPECIFICATIONS	03/10/20	J. QU

MATERIAL & FINISH:


- 1. BODY: STAINLESS STEEL, PASSIVATED
- 2. CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3. COUPLING NUT: STAINLESS STEEL, PASSIVATED
- 4. INSULATOR: PEI

ENVIRONMENTAL DATA:

- 1. TEMPERATURE RANGE: -55°C~+125°C
- 2. 2011/65/EU (RoHS): COMPLIANT AND 2015/863/(RoHS): COMPLIANT
- 3. 1999/45/EC(REACH): COMPLIANT

ELECTRICAL SPECIFICATIONS:

- 1. IMPEDANCE: 50 Ω
- 2. FREQUENCY RANGE: DC~40GHZ
- 3. VSWR: ≤1.25
- 4. INSERTION LOSS: ≤0.4 DB
- 5. SHIELDING EFFECTIVENESS: ≥90 DB

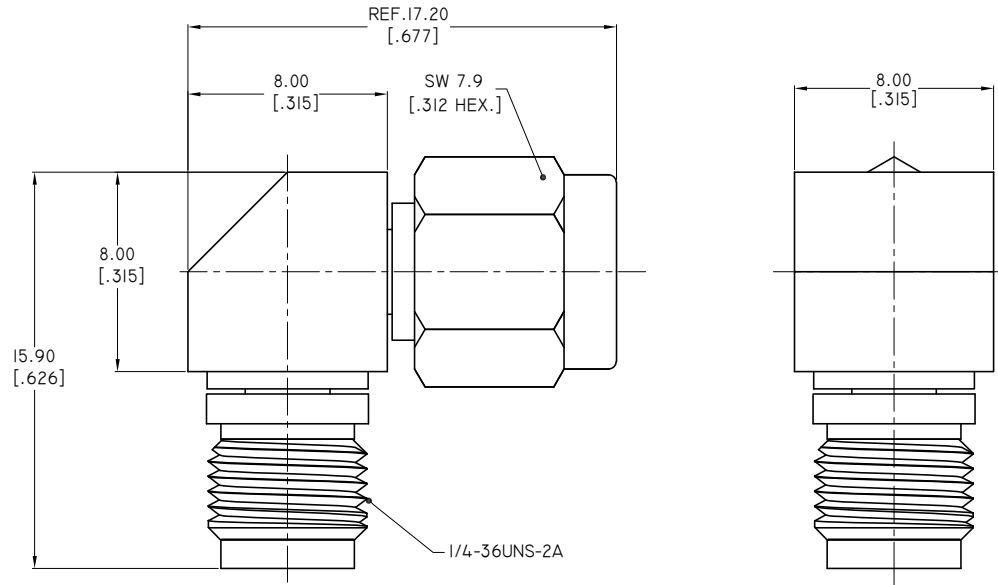

D

D

C

C

B

B

A

A

4

3

2

1

DRAWN	P. CHEN	DATE	03/10/20
CHECKED	L. YANG	DATE	03/10/20
APPROVED	J. QU	DATE	03/10/20
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2020 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
X°	±1°		
X°	±2°		



TITLE
PRECISION ADAPTER
RIGHT ANGLE 2.92MM MALE TO 2.92MM FEMALE

VIEW	PART NO. PA2929K		
	SIZE A3	SCALE 5:1	SHEET 1/1
	REV. D		