

**MATERIAL & FINISH:**

- 1 BODY: STAINLESS STEEL, PASSIVATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 INSULATOR: PEI
- 4 O-RING: SILICONNE RUBBER

**ENVIRONMENTAL DATA:**


- 1 TEMPERATURE RANGE: -55°C ~+125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1907/2006/EC(REACH): COMPLIANT

**ELECTRICAL DATA:**

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~40 GHz
- 3 VSWR: 1.20 MAX.

**REVISIONS**

REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/27/20	J. Q
B	3.00 [.118] PANEL MAX. ADDED	12/04/23	J. Q

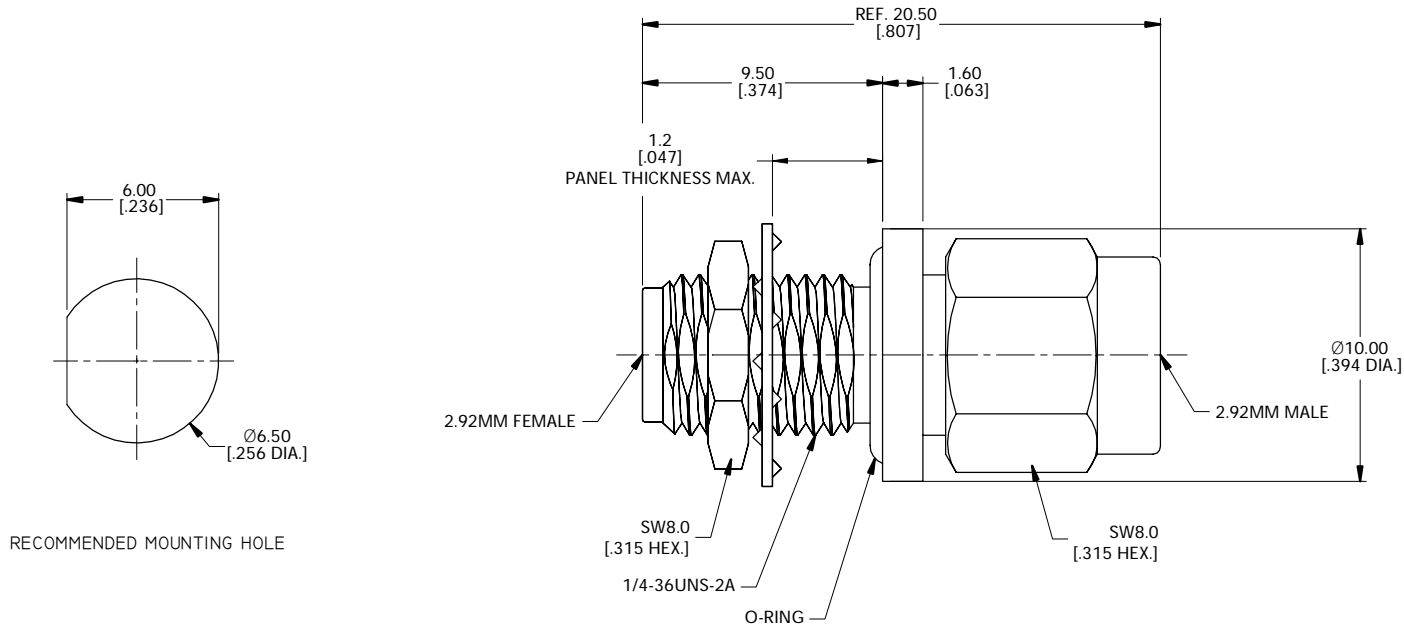

RECOMMENDED MOUNTING HOLE

DRAWN	X. Y	DATE	12/04/23		
CHECKED	W. Y	DATE	12/04/23		
APPROVED	J. Q	DATE	12/04/23		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2023 ANOISON ELECTRONICS LTD		TITLE	PRECISION ADAPTER 2.92MM MALE TO 2.92MM BULKHEAD FEMALE
XX	±0.13 [.005"]	VIEW		PART NO.	PA2929S
X	±0.20 [.008"]	SIZE	A3	SCALE	5:1
X	±0.50 [.019"]	SHEET	1/1	REV.	B
X°	±1°				
X"	±2°				