

4 3 2 1

**MATERIAL & FINISH:**

1. BODY: STAINLESS STEEL, PASSIVATED
2. CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
3. INSULATOR: PTFE & PEI
4. COUPLING NUT: STAINLESS STEEL, PASSIVATED


**ELECTRICAL DATA:**

1. IMPEDANCE: 50 Ω
2. FREQUENCY RANGE: DC~18 GHZ
3. VSWR: 1.15 MAX.


**ENVIRONMENTAL DATA:**

1. TEMPERATURE RANGE: -55 °C~+125 °C
2. 2011/65/EC ( RoHS): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/02/15	J. QU
B	DRAWING FORMAT CHANGED	07/26/17	J. QU
C	VSWR: 1.15 MAX. IS VSWR: 1.20 MAX.	04/25/22	J. QU

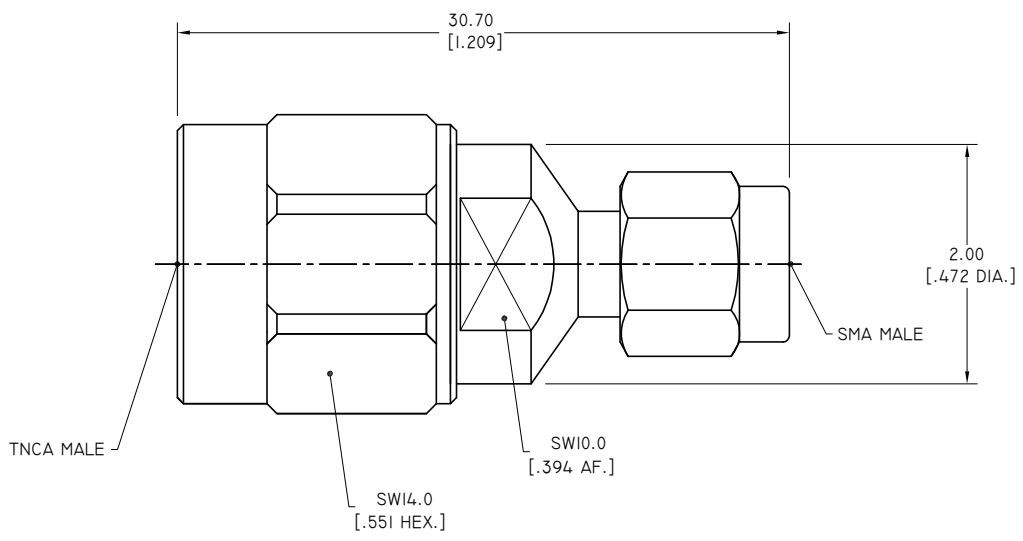


DRAWN	P. CHEN	DATE	04/25/22
CHECKED	L. YANG	DATE	04/25/22
APPROVED	J. QU	DATE	04/25/22
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2022 ANOISON ELECTRONICS LTD	
	.XX	.13	[.005"]
	.X	.20	[.008"]
	X	.50	[.019"]
	X		
	X		



**ANOISON**  
..we create connection for technologies

**TITLE**  
PRECISION ADAPTER  
TNCA MALE TO SMA MALE

**VIEW** 

**PART NO.**  
PA3021A

<b>SIZE</b> A3	<b>SCALE</b> 4:1	<b>SHEET</b> 1/1	<b>REV.</b> C
-------------------	---------------------	---------------------	------------------

4 3 2 1