


DESCRIPTION	MATERIAL	FINISH
Center Contact	Beryllium Copper Alloy	Gold
Body	Stainless Steel	Passivated
Coupling Nut	Stainless Steel	Passivated
Retaining Ring	Phosphor Bronze	Nickel
Insulator	PTFE/PEI	—
Gasket	MVQ (Silicone Rubber)	—



Technical Data

1. Impedance: 50 Ω
2. Temp. range: -55 °C ~ +125 °C
3. Frequency range: DC ~ 8GHz
4. VSWR: 1.15 max.
5. Durability: 500 Cycles
6. 2002/95/EC(RoHS): Compliant

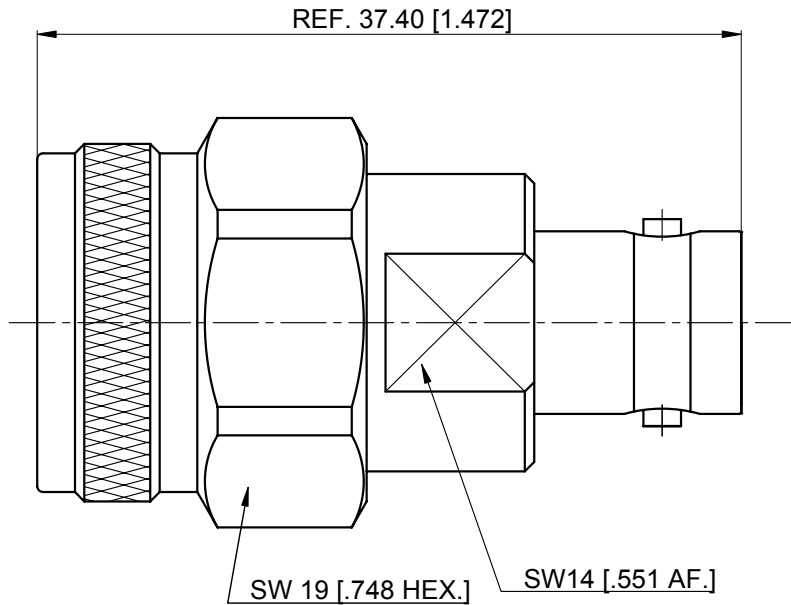

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

				Drawn: L. Yang 02/27/13	Title: Precision adapter, N Straight Male to BNC Female			
				Checked: X. B. Yang 02/27/13				
Description	Ecn.No	Date	Rev	Approved: J. Qu 02/27/13				
 <p>Unless otherwise specified dimensions are in millimeters, dimensions in [] are in inches for customer reference only. Unless Otherwise Specified tolerance are:</p> <p>.XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°</p>				View:		Part No: PA3151B		
					Size: A4	Scale: 2.5:1	Sheet: 1/1	Rev: A