


1.0 MATERIAL & FINISH:
 1.1 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
 1.2 INSULATOR: PTFE
 1.3 BODY: STAINLESS STEEL, PASSIVATED
 1.4 COUPLING NUT: STAINLESS STEEL, PASSIVATED

2.0 ENVIRONMENTAL DATA:
 2.1 TEMPERATURE RANGE: -55°C~+165°C
 2.2 2011/65/EU (RoHS): COMPLIANT

3.0 ELECTRICAL SPECIFICATIONS:
 3.1 IMPEDANCE: 50 Ω
 3.2 FREQUENCY RANGE: DC~18GHZ
 3.3 VSWR: 1.15 MAX. DC~11GHZ
 1.20 MAX. 11~18GHZ

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	08/07/13	J. QU
B	CHANGED P/N	06/01/15	J. QU

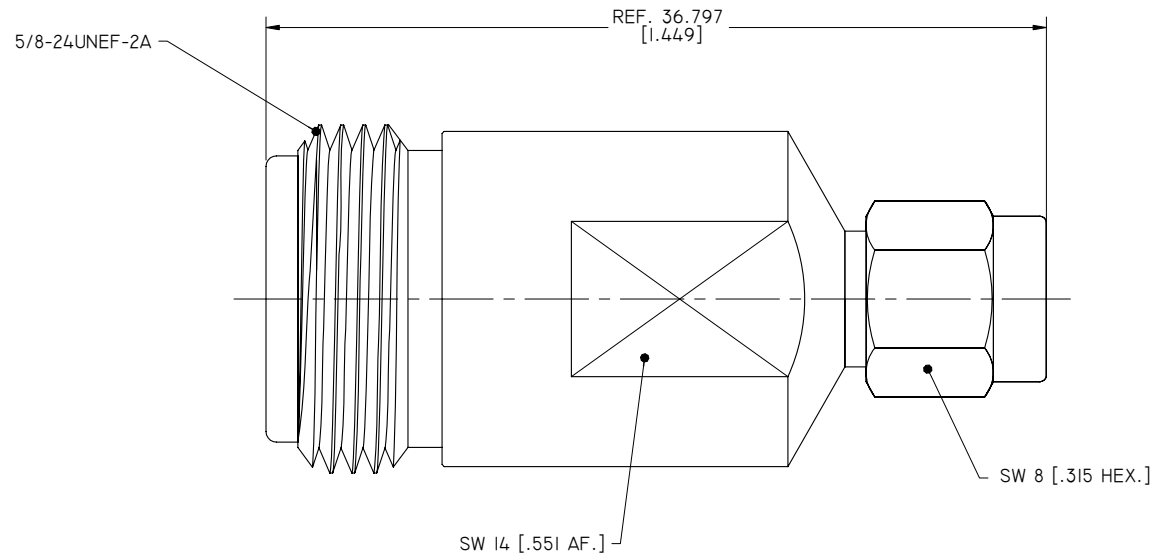

DRAWN	L. YANG	DATE	06/01/15		
CHECKED	X. B. YANG	DATE	06/01/15		
APPROVED	J. QU	DATE	06/01/15		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2015 ANOISON ELECTRONICS LTD		TITLE PRECISION ADAPTER, N STRAIGHT FEMALE TO SMA MALE	
		VIEW 	PART NO. PA512ID		
SIZE	A3	SCALE	4:1	SHEET 1/1	REV. B