

MATERIAL & FINISH:

1. BODY: STAINLESS STEEL, PASSIVATED
2. CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED

ENVIRONMENTAL DATA:

1. STORAGE TEMPERATURE: -55°C~+125°C
2. OPERATING TEMPERATURE: 0°C~+85°C
3. 2011/65/EU (RoHS): COMPLIANT


ELECTRICAL DATA:

- IMPEDANCE: 50 Ω
- FREQUENCY RANGE: DC~40 GHZ
- VSWR: 1.25 MAX.
- INSERTION LOSS: 0.40 DB MAX.

MECHANICAL DATA:

1. MECHANICAL DURABILITY: 2000 CYCLES MIN.
2. RECOMMENDED TORQUE:
 - NMD2.4MM FEMALE: 1.35~2 NM
 - NMD2.92MM MALE: 1.35~2 NM

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/14/15	J. QU

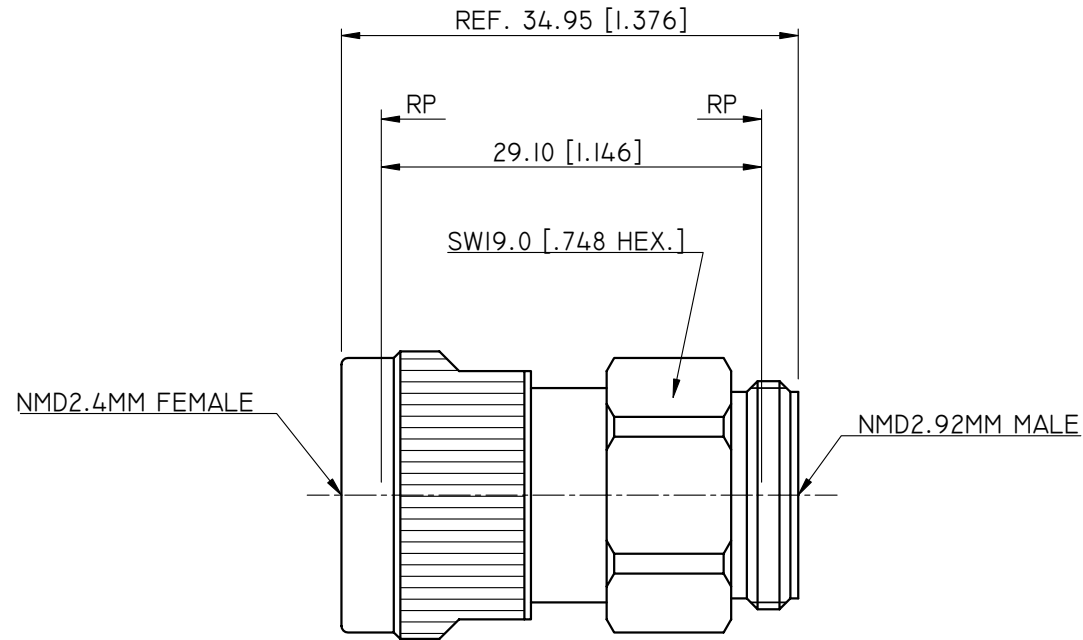

DRAWN X. B. YANG	DATE 05/14/15													
CHECKED L. YANG	DATE 05/14/15													
APPROVED J. QU	DATE 05/14/15													
<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:</small>		<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2015 ANOISON ELECTRONICS LTD</small>												
<table border="0"> <tr> <td>.XX</td> <td>±0.13 [.005"]</td> </tr> <tr> <td>.X</td> <td>±0.20 [.008"]</td> </tr> <tr> <td>X</td> <td>±0.50 [.019"]</td> </tr> <tr> <td>.X°</td> <td>±1°</td> </tr> <tr> <td>X°</td> <td>±2°</td> </tr> </table>		.XX	±0.13 [.005"]	.X	±0.20 [.008"]	X	±0.50 [.019"]	.X°	±1°	X°	±2°	TITLE ADAPTER, NMD2.4MM FEMALE TO NMD2.92MM MALE		
.XX	±0.13 [.005"]													
.X	±0.20 [.008"]													
X	±0.50 [.019"]													
.X°	±1°													
X°	±2°													
VIEW 		PART NO. PA6864D												
		SIZE A3	SCALE 2.5:1	SHEET 1/1	REV. A									