


MATERIAL & FINISH:
 1. BODY: STAINLESS STEEL, PASSIVATED
 2. CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
 3. INSULATOR: PEI
 4. COUPLING NUT: STAINLESS STEEL, PASSIVATED

ENVIRONMENTAL DATA:
 1. STORAGE TEMPERATURE: -55°C~+125°C
 2. OPERATING TEMPERATURE: 0°C~+85°C
 3. 2011/65/EU (RoHS): COMPLIANT

ELECTRICAL DATA:
 1. IMPEDANCE: 50 Ω
 2. FREQUENCY RANGE: DC~110 GHz
 3. RETURN LOSS: 15.5 MIN.
 4. INSERTION LOSS: 1.0 DB MAX.

MECHANICAL DATA:
 1. MECHANICAL DURABILITY: 1000 CYCLES MIN.
 2. RECOMMENDED TORQUE:
 NMD1.0MM MALE: 1.13 NM
 1.0MM FEMALE: 0.45 NM

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/11/24	J. Q

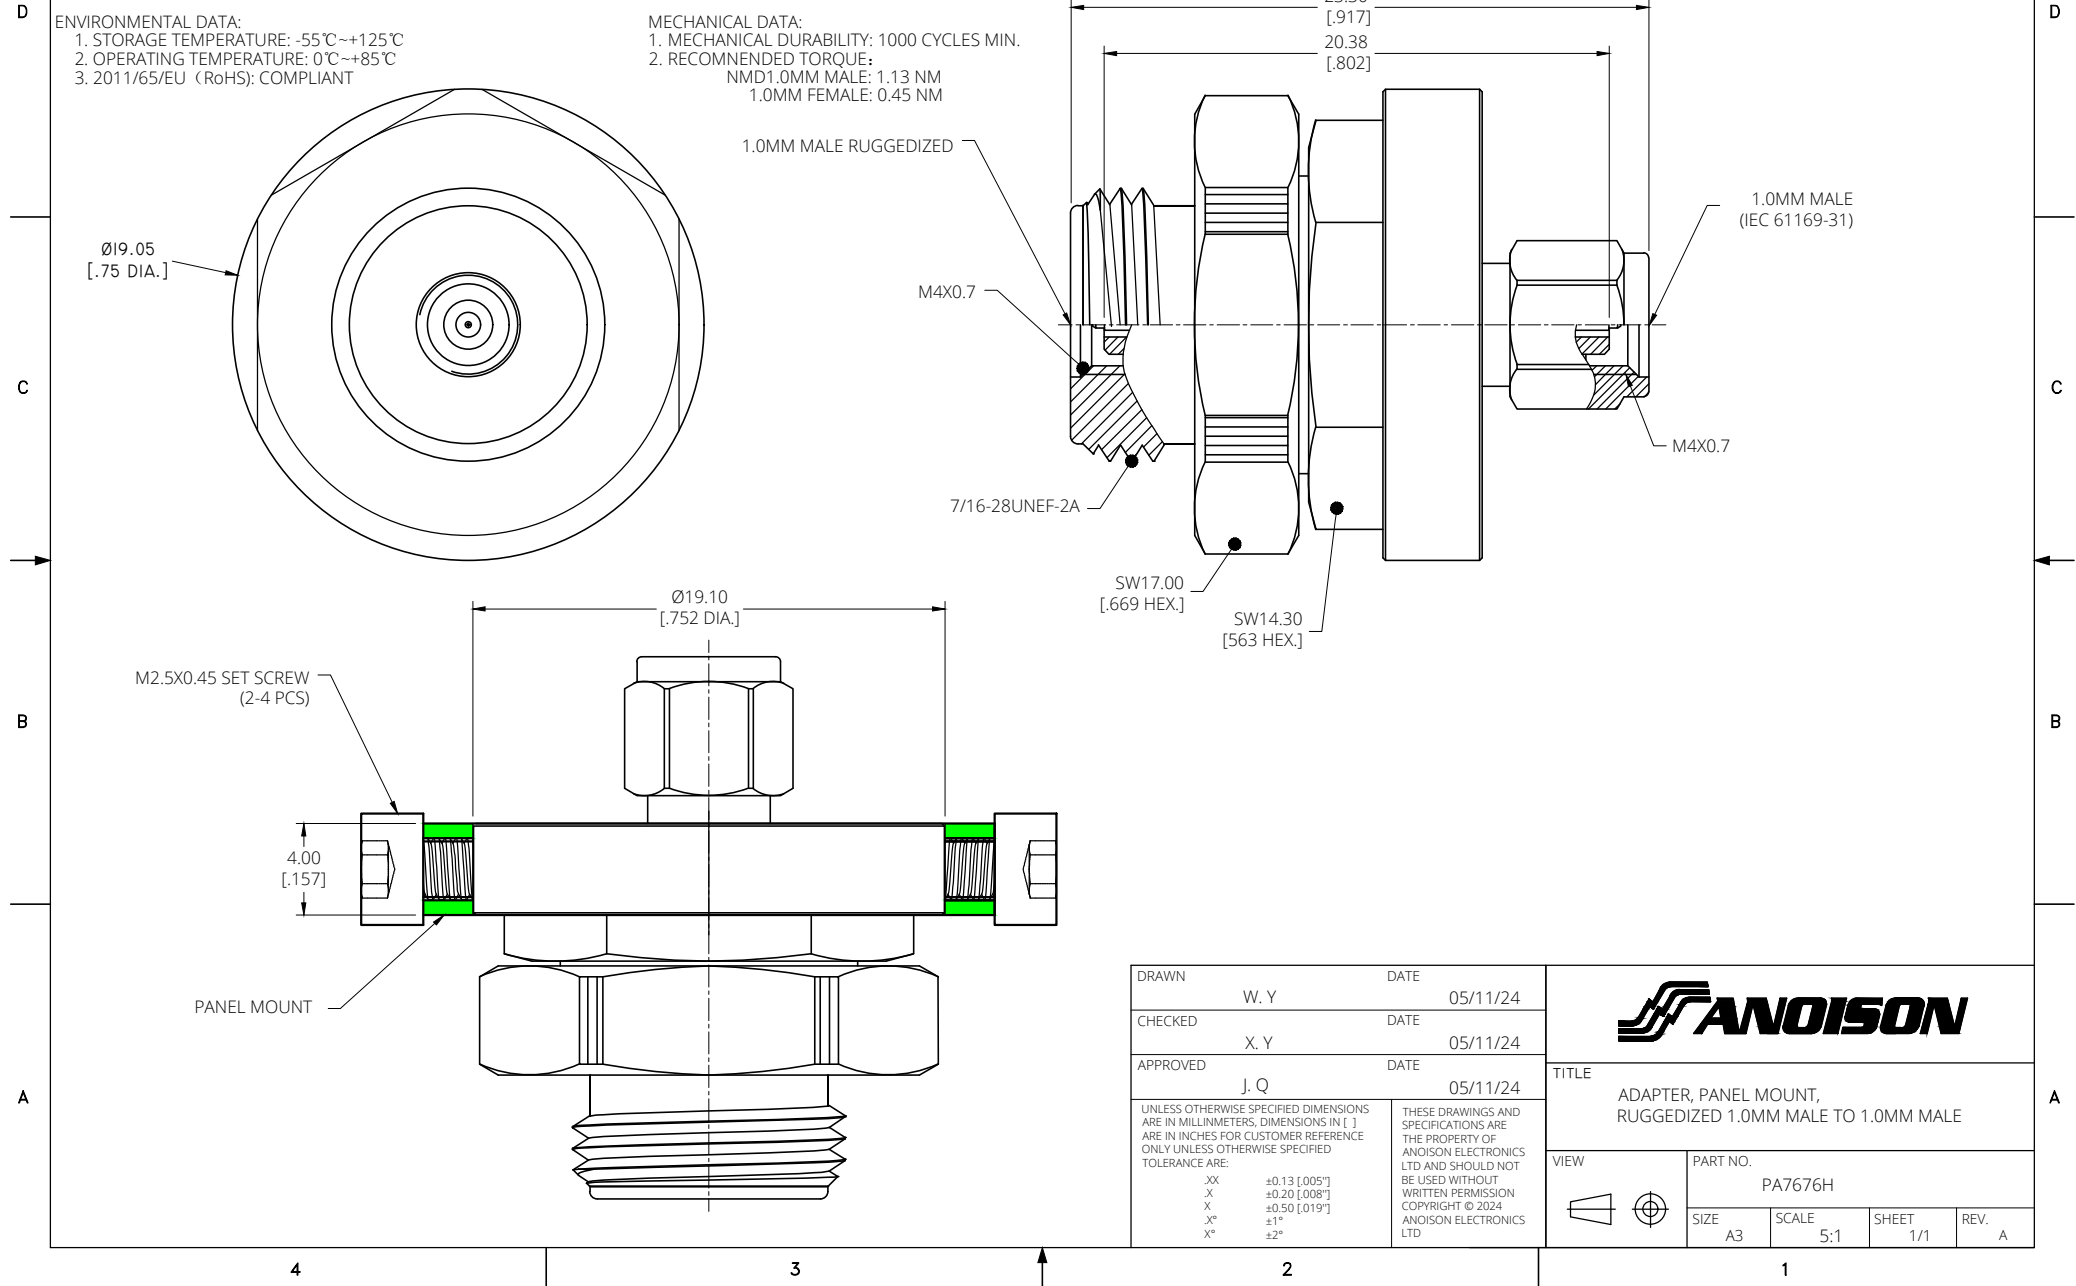

DRAWN	W. Y	DATE	05/11/24
CHECKED	X. Y	DATE	05/11/24
APPROVED	J. Q	DATE	05/11/24
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2024 ANOISON ELECTRONICS LTD	
XX	±0.13 [0.005"]		
X	±0.20 [0.008"]		
X	±0.50 [0.019"]		
X°	±1°		
X°	±2°		

ANOISON

TITLE: ADAPTER, PANEL MOUNT, RUGGEDIZED 1.0MM MALE TO 1.0MM MALE

VIEW:

PART NO.: PA7676H

SIZE	A3	SCALE	5:1	SHEET	1/1	REV.	A
------	----	-------	-----	-------	-----	------	---