

4

3

2

1

MATERIAL & FINISH

- 1 BODY: STAINLESS STELL, PASSIVATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 INSULATOR: PTFE & PEI
- 4 COUPLING NUT: STAINLESS STELL, PASSIVATED


ELECTRICAL DATA:

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC~40 GHZ
- 3 VSWR: 1.20 MAX.


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/12/21	J. QU

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55 °C~+125 °C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1907/2006/EC(REACH) AND 1999/45/EC(REACH): COMPLIANT

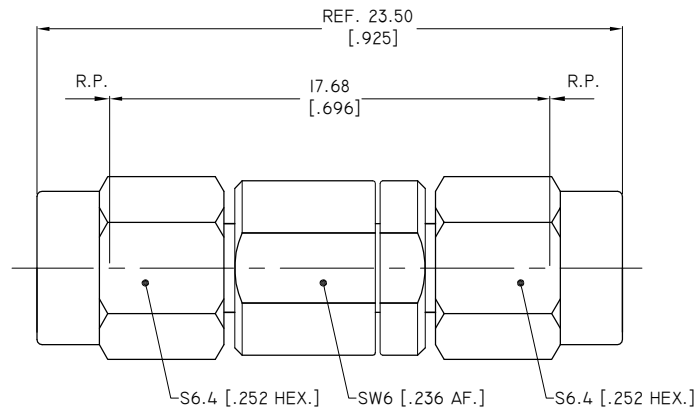


DRAWN	L. YANG	DATE	05/12/21
CHECKED	X. B. YANG	DATE	05/12/21
APPROVED	J. QU	DATE	05/12/21
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2021 ANOISON ELECTRONICS LTD	
.XX	.13 [.005"]		
.X	.20 [.008"]		
X	.50 [.019"]		
X			
X			



ANOISON
...we create connection for technologies

TITLE
PRECISION ADAPTER, SSMA MALE TO SSMA MALE

VIEW 

PART NO. PA9191A

SIZE A3	SCALE 5:1	SHEET 1/1	REV. A
----------------	------------------	------------------	---------------

4

3

2

1