


ELECTRICAL DATA:

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC~18 GHZ
- 3 VSWR: 1.25 MAX.
- 4 INSERTION LOSS: 1.65 DB MAX.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/02/18	J. QU

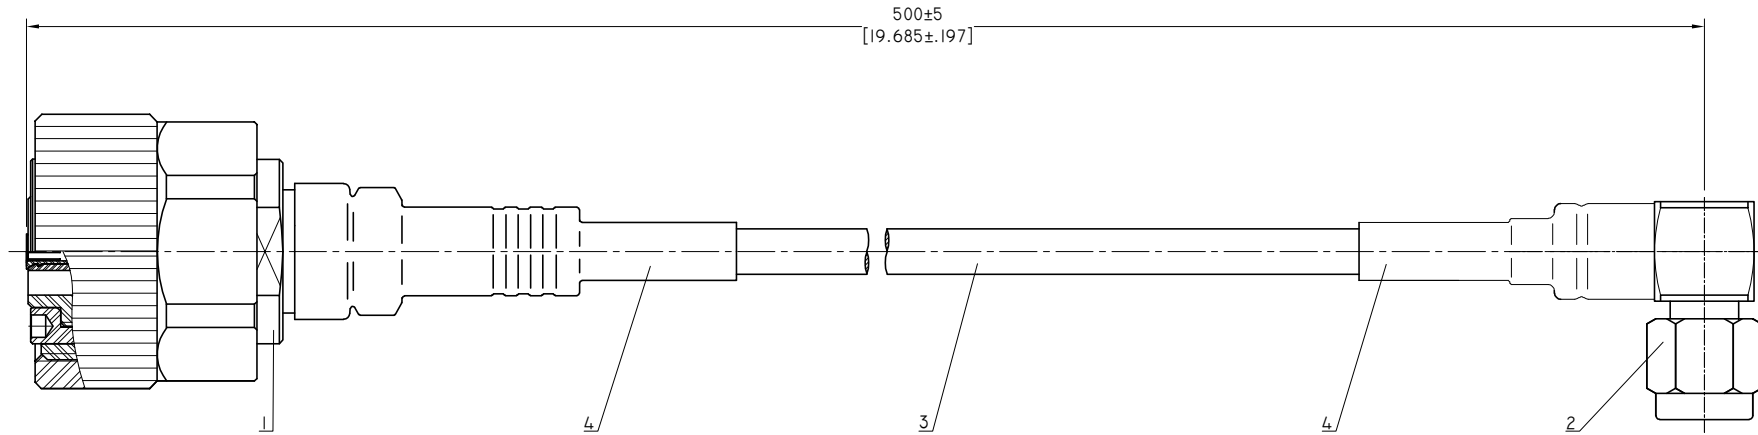

SEQUENCE NUMBER	PART NO.	DESCRIPTION	QTY
4	ANO 8.687.162	ADHESIVE HEAT-SHRINK TUBE Ø7.9X40	2
3	PLEX-I40	PLEX-I40 CABLE	1
2	ANO 292I-2102	2.92MM R/A MALE SOLDER FOR PLEX-I40 CABLE, CAPTIVATED CONTACT	1
1	ANO 651I-2001	7MM STRAIGHT SOLDER FOR PLEX-I40 CABLE, CAPTIVATED CONTACT	1

DRAWN	P. CHEN	DATE	07/02/18
CHECKED	L. YANG	DATE	07/02/18
APPROVED	J. QU	DATE	07/02/18



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

.XX	±0.13 [.005"]
.X	±0.20 [.008"]
X	±0.50 [.019"]
X°	±1°
X"	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2018 ANOISON ELECTRONICS LTD

TITLE
CABLE ASSEMBLY, 7MM STRAIGHT TO 2.92MM R/A MALE FOR PLEX-I40 CABLE, 0.5 METERS

VIEW	PART NO.	SCALE		
	PLEXI40-7MM-29LM-50CM	A3	2.5:1	SHEET 1/1
		REV.	A	