

4

3

2

1

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: 50KHz~4GHz
- 3 VSWR: 1.25 MAX. AT 50KHz~100MHz
1.45 MAX. AT 100MHz~4GHz
- 4 INSERTION LOSS: 0.34dB MAX.AT 50KHz~100MHz
0.52dB MAX. AT 100MHz~4GHz

D

D

C


C

B

B

A

A

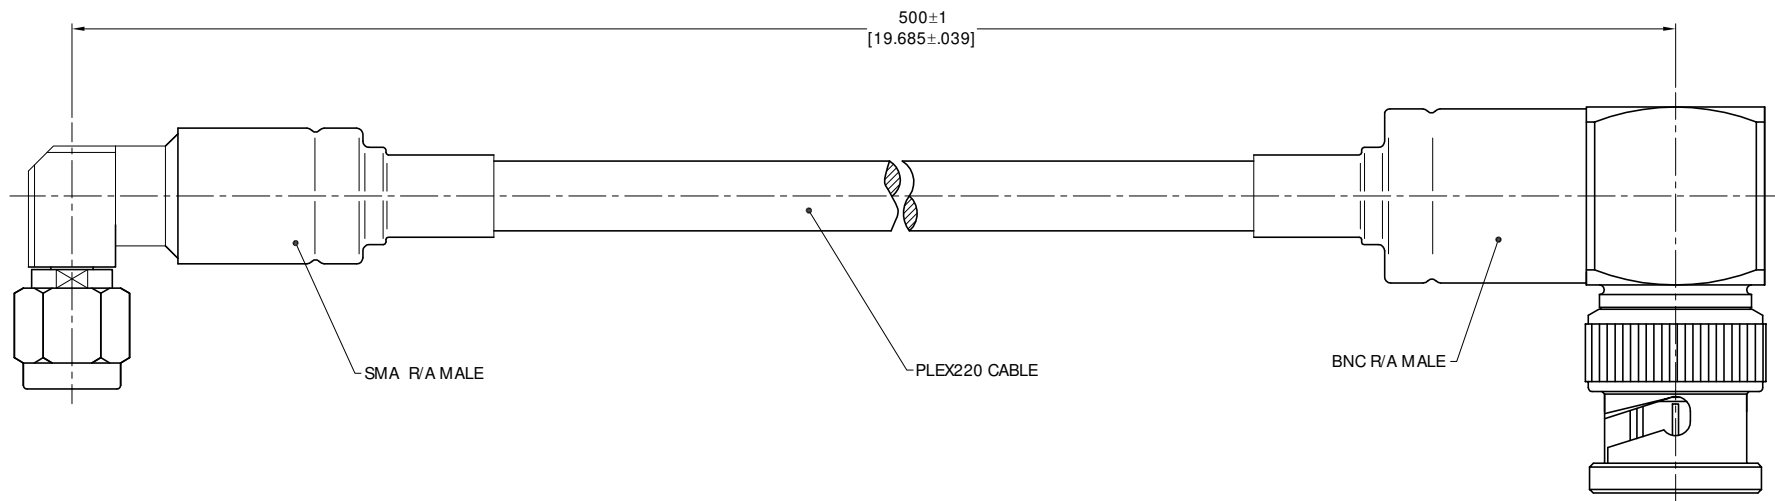

TITLE
 CABLE ASSEMBLY, SMA R/A MALE TO BNC R/A MALE,
 PLEX220 CABLE, 0.5 METERS

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGED WITHOUT NOTICE AT ANY TIME
 3. DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES
 4. LENGTH TOLERANCE IS ±2%.

VIEW	PART NO. PLEX220-SMALM-BNCLM-0.5M			
	SIZE A3	SCALE 2.5:1	SHEET 1/1	REV. A

4

3

2

1