

4

3

2

1

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC~18 GHz
- 3 VSWR: 1.35 MAX
- 4 INSERTION LOSS: 0.55 dB TYP.

D

D

C

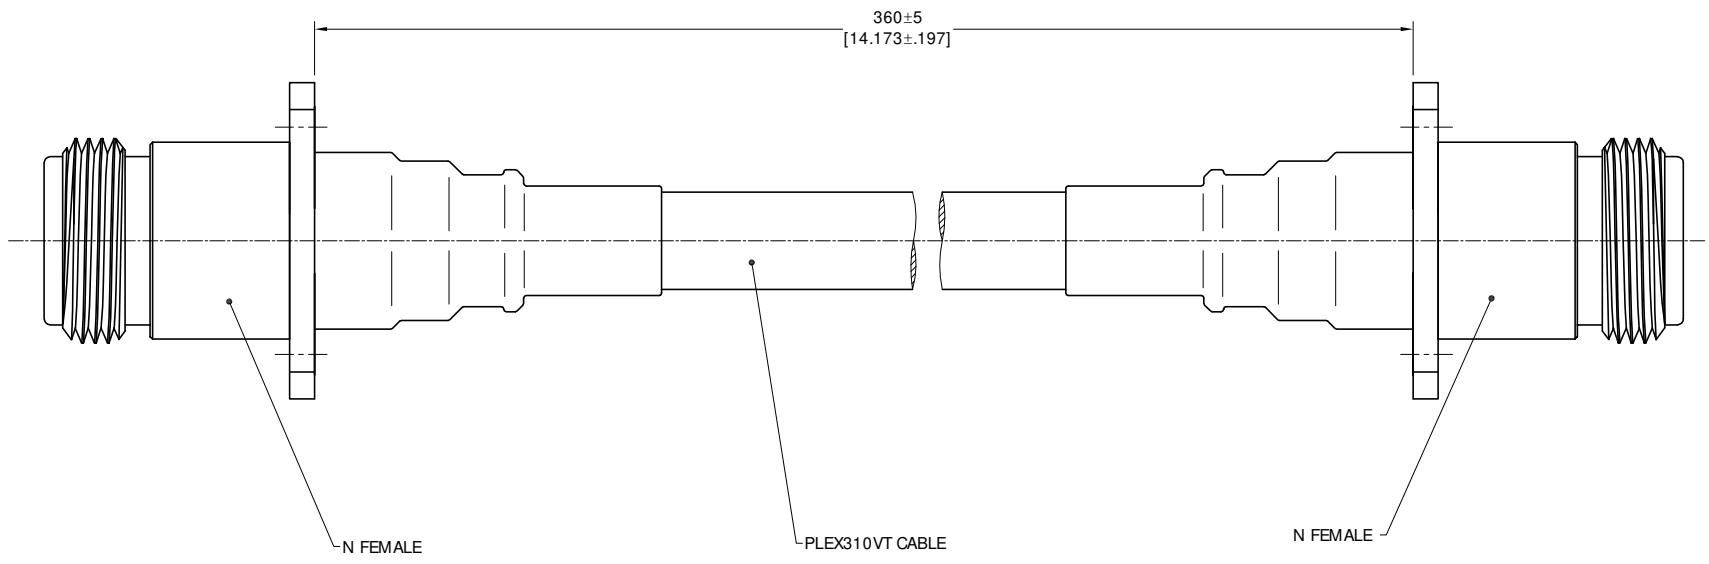
C

B

B



A

A



TITLE
 CABLE ASSEMBLY, N STRAIGHT FEMALE 4 HOLE FLANGE
 MOUNT TO N STRAIGHT FEMALE 4 HOLE FLANGE MOUNT,
 PLEX310VT CABLE, 360MM

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGED WITHOUT NOTICE AT ANY TIME
 3. DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES
 4. LENGTH TOLERANCE IS $\pm 2\%$.

VIEW	PART NO.			
 	PLEX310VT-NF4HF-NF4HF-360MM			
SIZE	SCALE	SHEET	REV.	
A3	2.5:1	1/1	A	

4

3

2

1