


**ELECTRICAL DATA:**


- 1. IMPEDANCE: 50 OHMS
- 2. FREQUENCY RANGE: DC~18 GHz
- 3. VSWR: 1.20 MAX. AT DC~6 GHz  
1.30 MAX. AT 6~18 GHz
- 4. INSERTION LOSS: 0.60 dB MAX. AT DC~6 GHz  
0.90 dB MAX. AT 6~18 GHz

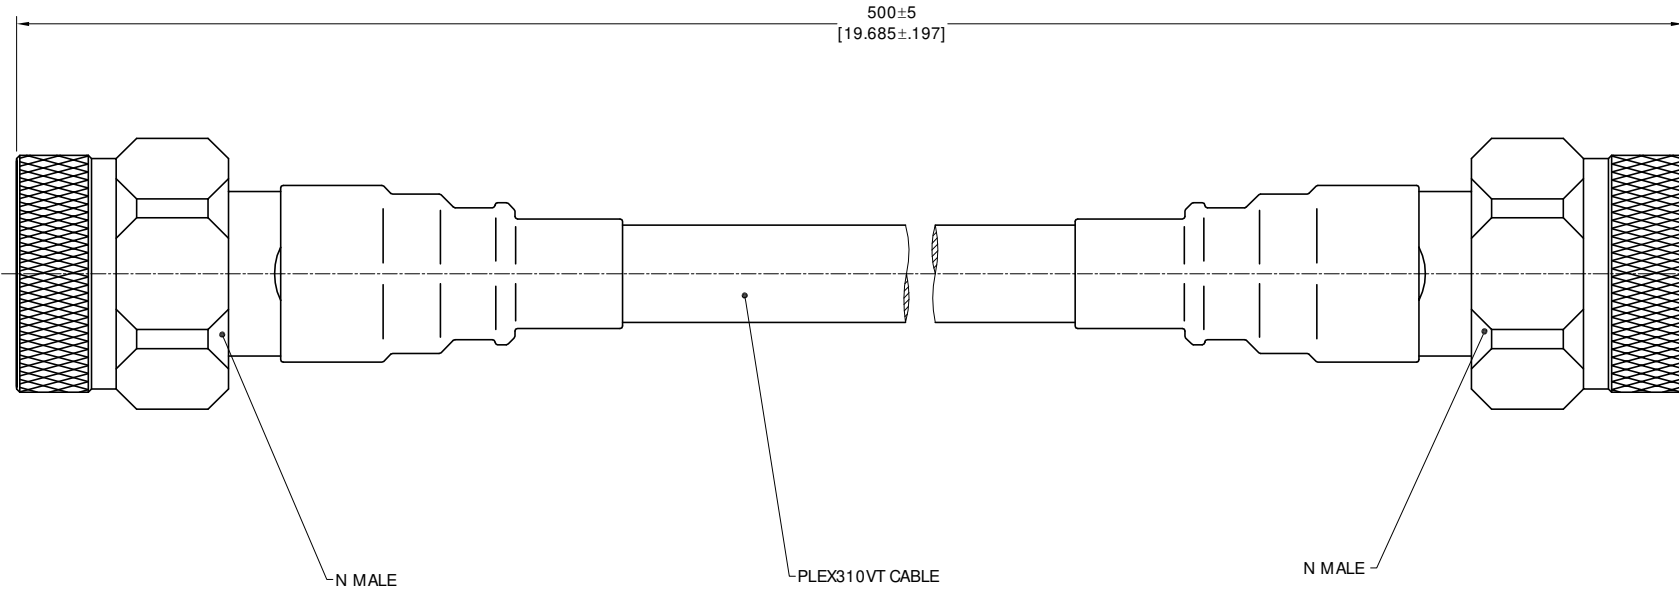

TITLE  
CABLE ASSEMBLY, N STRAIGHT MALE TO N STRAIGHT MALE,  
PLEX310VT CABLE, 0.5 METERS

- NOTES:
- 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
  - 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGED WITHOUT NOTICE AT ANY TIME
  - 3. DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES
  - 4. LENGTH TOLERANCE IS ±2%.

VIEW



PART NO.

PLEX310VT-NM-NM-50CM

SIZE  
A3

SCALE  
2.5:1

SHEET  
1/1

REV.  
A