


ELECTRICAL DATA:

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC~6 GHZ
- 3 VSWR: 1.30 MAX. AT DC~3 GHZ
- 4 INSERTION LOSS: 8.5 DB MAX.
- 5 WITHSTAND VOLTAGE: 1000 V

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -40°C~+85°C
- 2 2011/65/EU (RoHS): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/18/16	J. QU

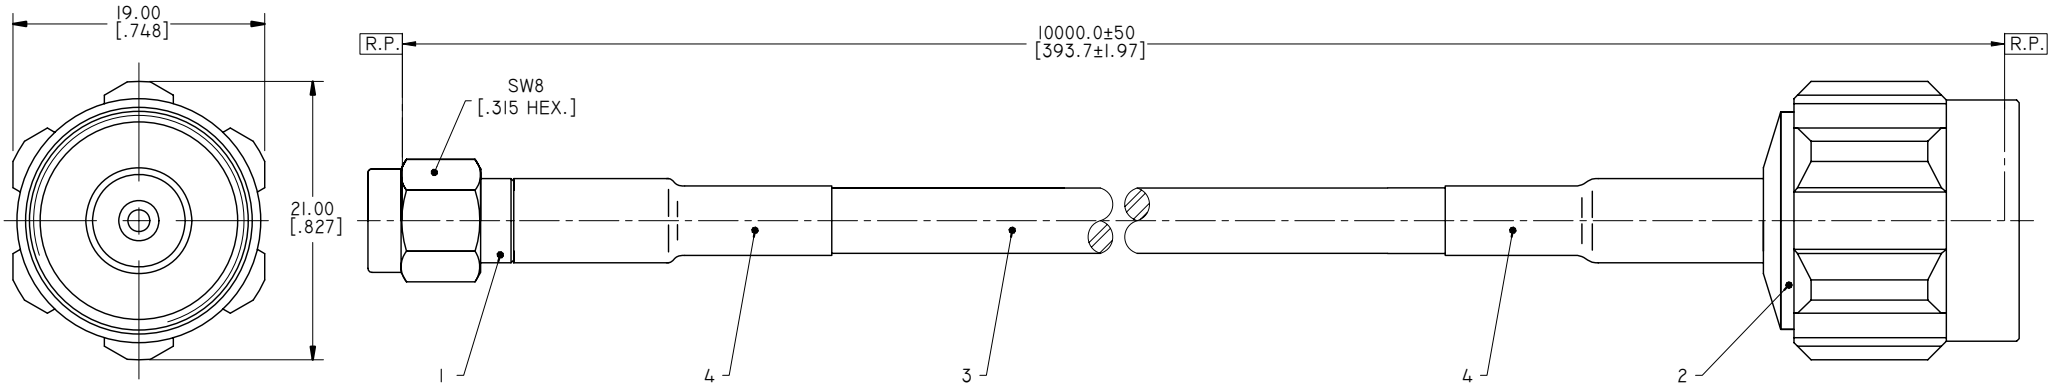

FOR: DSPM.IT

4	ANO 8.687.103	HEAT-SHRINK TUBING	2
3	RG142	RG142 CABLE	1
2	ANO 5111-2255-1	N STRAIGHT MALE CRIMP FOR RG142 CABLE	1
1	ANO 2111-2237	SMA STRAIGHT MALE CRIMP FOR RG142 CABLE	1
SEQUENCE NUMBER	PART NO.	DESCRIPTION	QTY

DRAWN	P. CHEN	DATE	06/18/16
CHECKED	L. YANG	DATE	06/18/16
APPROVED	J. QU	DATE	06/18/16
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2016 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE CABLE ASSEMBLY, SMA STRAIGHT MALE TO N STRAIGHT MALE, RG142 CABLE, 10 METER				
VIEW 		PART NO. RG142-SMNM-10M		
SIZE A3	SCALE 2.5:1	SHEET 1/1	REV. A	