


RG 188

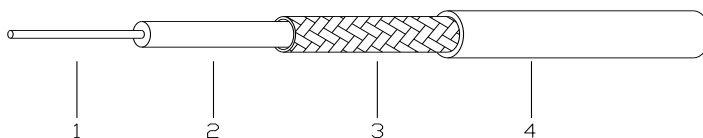

Construction Specification

	Material	Diameter(mm)	
		mm	inch
1.Inner Conductor	Silver Plated Copper Clad Steel	7x0.17	7x0.007
2.Dielectric	PTFE	1.52	0.060
3.Outer Conductor	Silver Plated Copper Braid	1.95	0.077
4.Jacket	FEP	2.67	0.105

Electrical Characteristics

Capacitance(PF/m)	96.5 Pf/m 29.56 pf/Ft
Impedance(ohm)	50 Ohms
Velocity(%)	70
Max.Oper Voltage(VMS)	1200 VMS
Max.Oper Frequency(MHz)	3000 MHz

Mechanical Characteristics

Bending Radius(mm)	13 mm 0.512 inch
--------------------	---------------------

Environmental Characteristics

Operating Temp(°C)	-55 to +250
--------------------	-------------

Attenuation

Frequency(MHz)	Attenuation (dB/100m)	
	dB/100 m	dB/100 Ft
100	26.2	7.988
400	53.1	16.189
1000	85.6	26.098
3000	153.2	46.707