


ELECTRICAL DATA:

1. IMPEDANCE: 50 Ω
2. FREQUENCY RANGE: DC~1 GHZ
3. VSWR: ≤1.30
4. INSERTION LOSS: ≤ 1.3 DB

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/19/20	J. QU

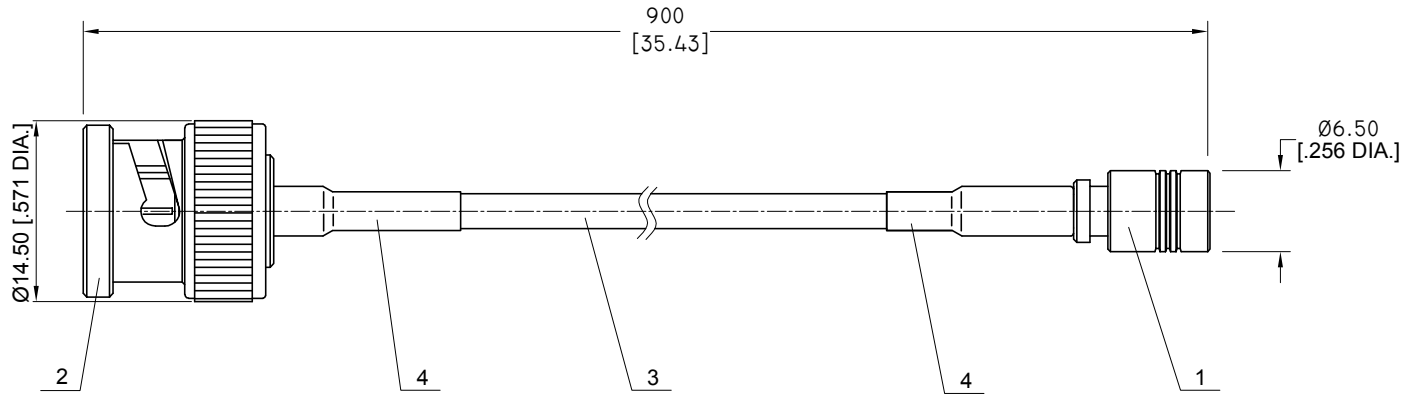

SEQUENCE NUMBER	PART NO.	DESCRIPTION	QTY
4	ANO 8.687.102	HEAT-SHRINK TUBE	2
3	RG3126	RG316 CABLE	1
2	ANO 3111-2002	BNC STRAIGHT MALE CRIMP FOR RG316 CABLE	1
1	ANO 1711-2024	SMB STRAIGHT MALE CRIMP FOR RG316 CABLE	1

DRAWN	P. CHEN	DATE	03/19/20
CHECKED	L. YANG	DATE	03/19/20
APPROVED	J. QU	DATE	03/19/20



TITLE
CABLE ASSEMBLY, BNC STRAIGHT MALE TO SMB MALE, RG316 CABLE, 0.9 METERS

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:
 .XX ±0.13 [.005"]
 .X ±0.20 [.008"]
 X ±0.50 [.019"]
 X° ±1°
 X* ±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2020 ANOISON ELECTRONICS LTD

VIEW	PART NO.	SIZE	SCALE	SHEET	REV.
	RG316-BNCM-SMBM-0.9M	A3	2.5:1	1/1	A