


ELECTRICAL DATA:

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC~3 GHZ
- 3 VSWR: 1.35 MAX.
- 4 INSERT LOSS: 1.10 DB

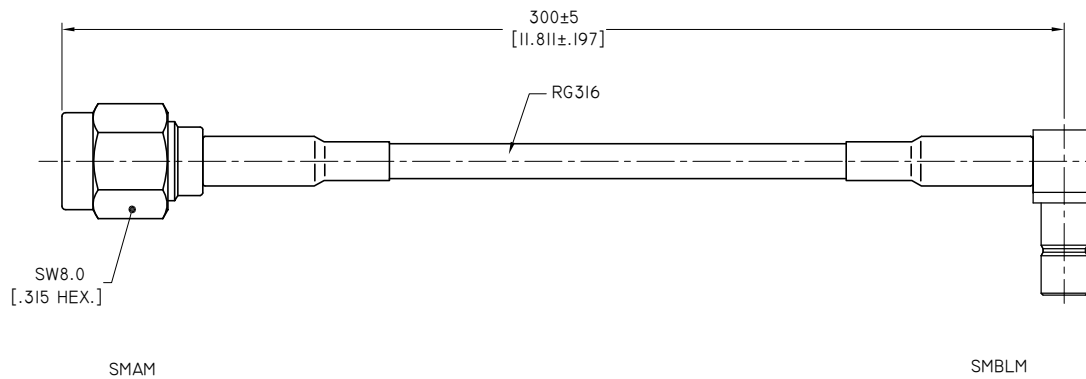

TITLE
 CABLE ASSEMBLY, SMA STRAIGHT MALE TO SMB
 R/A JACK, ANO RG316 CABLE, 300MM

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGED WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES
 4. LENGTH TOLERANCE IS ±1.5%.

VIEW		PART NO.			
		RG316-SMAM-SMBLM-300MM			
SIZE	SCALE	SHEET	REV.		
A3	2.5:1	1/1	A		