


ELECTRICAL SPECIFICATIONS:

1. IMPEDANCE: 75 Ω
2. WITHSTAND VOLTAGE: 1000 V
3. FREQUENCY RANGE: DC~2 GHz

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/27/19	J. QU

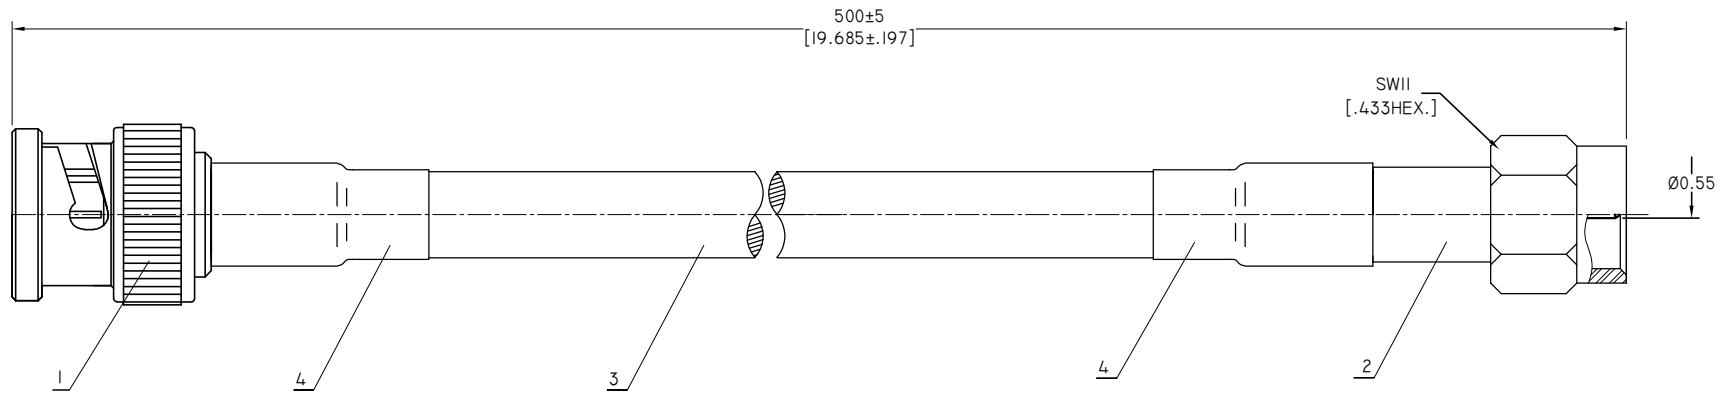

SEQUENCE NUMBER	PART NO.	DESCRIPTION	QTY
4	ANO8.687.III	HEAT-SHRINK TUBING	2
3	RG6	RG6 CABLE ,75Ω	1
2	ANO 971I-2017	F STRAIGHT MALE CRIMP FOR RG6 CABLE	1
1	ANO 401I-2011	BNC STRAIGHT MALE CRIMP FOR RG6 CABLE	1

DRAWN	P. CHEN	DATE	03/27/19
CHECKED	L. YANG	DATE	03/27/19
APPROVED	J. QU	DATE	03/27/19
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2019 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
X°	±1°		
X"	±2°		

ANOISON

TITLE
CABLE ASSEMBLY, BNC 75Ω STRAIGHT MALE TO F 75Ω STRAIGHT MALE FOR RG6 CABLE, 0.5 METERS

VIEW

PART NO.
RG6-BNCM-FM-50CM

SIZE A3	SCALE 2.5:1	SHEET 1/1	REV. A
-------------------	-----------------------	---------------------	------------------