

4

3

2

1

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC-40 GHz
- 3 VSWR: 1.30 MAX.
- 4 INSERTION LOSS: 1.35 dB MAX.

D

D


C

B

B

A


A

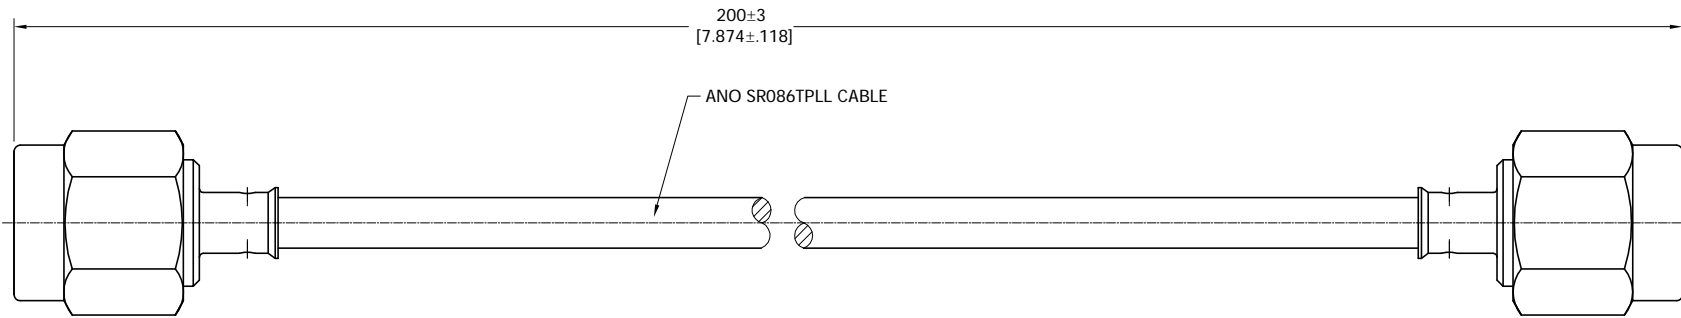

TITLE
 CABLE ASSEMBLY, 2.92MM STRAIGHT MALE TO 2.92MM STRAIGHT MALE, ANO SR086TPLL CABLE, 20CM

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGED WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES
 4. LENGTH TOLERANCE IS ±2%.

VIEW



PART NO.

SR086TPLL-29M-29M-20CM

SIZE
A3

SCALE
4:1

SHEET
1/1

REV.
A

4

3

2

1