


ELECTRICAL DATA:

1. IMPEDANCE: 50 Ω
2. FREQUENCY RANGE: DC~10 GHZ
3. VSWR: ≤1.35
4. INSERTION LOSS: ≤ 2.40 DB

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/19/20	J. QU

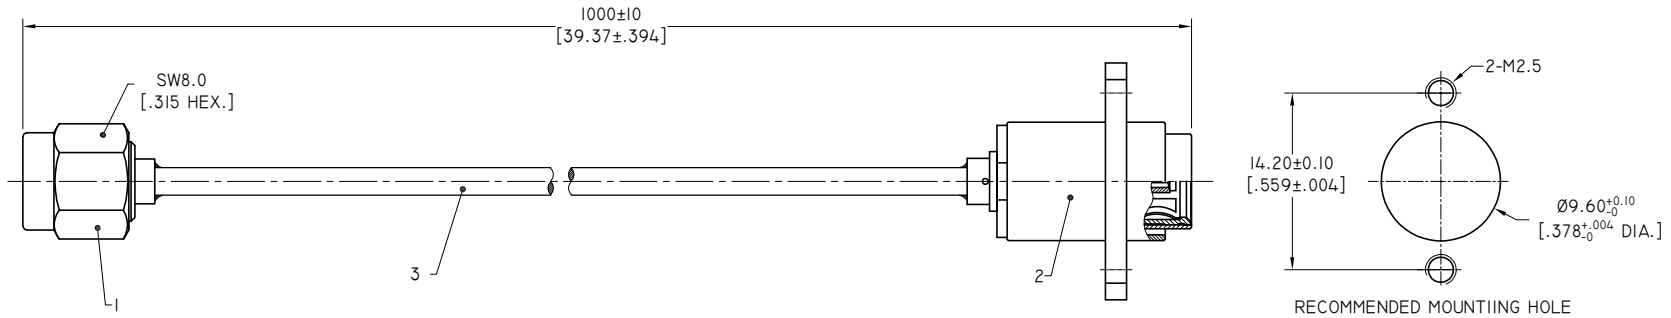

3	SR086TP-LL	.086TP LOS LOSS SEMI-RIGID CABLE	1
2	ANO 1412-2014	BMA STRAIGHT JACK SLIDE-ON CONNECTOR SOLDER ATTACHMENT 2 HOLE FLANGE MOUNT FOR .086LL CABLE, .559 INCH HOLE SPACING	1
1	ANO 2111-2055-2	SMA STRAIGHT MALE SOLDER FOR .086LL CABLE	1
SEQUENCE NUMBER	PART NO.	DESCRIPTION	QTY

DRAWN	P. CHEN	DATE	03/19/20
CHECKED	L. YANG	DATE	03/19/20
APPROVED	J. QU	DATE	03/19/20
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2020 ANOISON ELECTRONICS LTD	
.XX	±0.13 [0.005"]		
.X	±0.20 [0.008"]		
X	±0.50 [0.019"]		
X°	±1°		
X"	±2°		

ANOISON

TITLE
CABLE ASSEMBLY, SMA STRAIGHT MALE TO BMA JACK, SR086TP-LL CBALE, 1.0 METER

VIEW

PART NO.
SR086TPLL-SMAM-BMAF-1.0M

SIZE A3	SCALE 2.5:1	SHEET 1/1	REV. A
-------------------	-----------------------	---------------------	------------------