

4

3


2

1

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: 10-10.5GHz
- 3 VSWR: 1.25 MAX.
- 4 INSERTION LOSS: 0.36dB MAX.
- 5 \*PHASE-MATCHED IN: 10° MAX.
- 6 POWER: 179W @10GHz

\*\* 10 degrees based on reference 0 degree #001 cable.

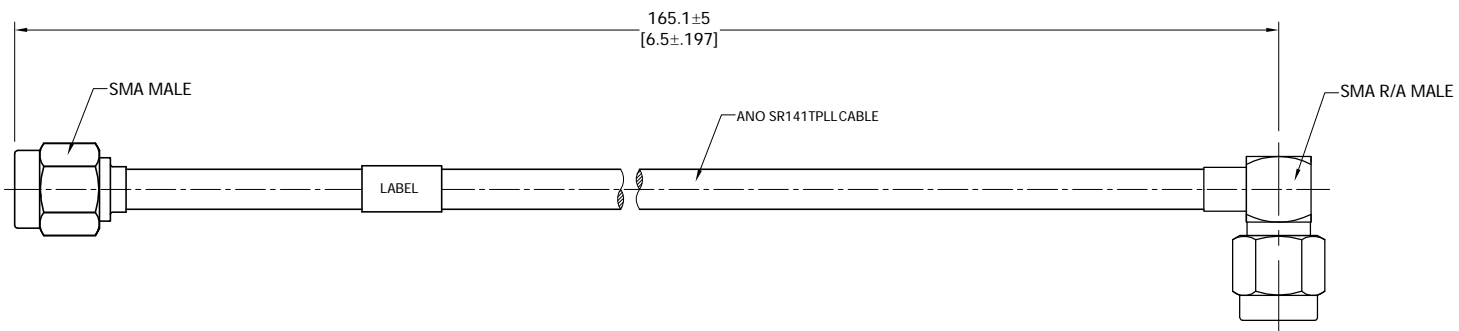

LABEL: 001  
 S/N(001,002,003...800)



TITLE  
 CABLE ASSEMBLY, SMA STRAIGHT MALE TO SMA R/A MALE,  
 SR141TPLL CABLE, 6.5 INCH, PHASE-MATCHED IN 10° MAX.

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGED WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES  
 4. LENGTH TOLERANCE IS ±2%.

VIEW	PART NO. SR141TPLL-SMAM-SMALM-6.5-PM			
	SIZE A3	SCALE 2:1	SHEET 1/1	REV. A

4

3

2

1