

4

3


2

1

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	02/16/17	J. QU
B	CHANGED DRAWINGS	03/29/22	J. QU

**MATERIAL & FINISH:**  
STAINLESS STEEL, PASSIVATED

**ENVIRONMENTAL DATA:**  
1 TEMPERATURE RANGE: -55 °C ~ +125 °C  
2 2011/65/EU (RoHS): COMPLIANT

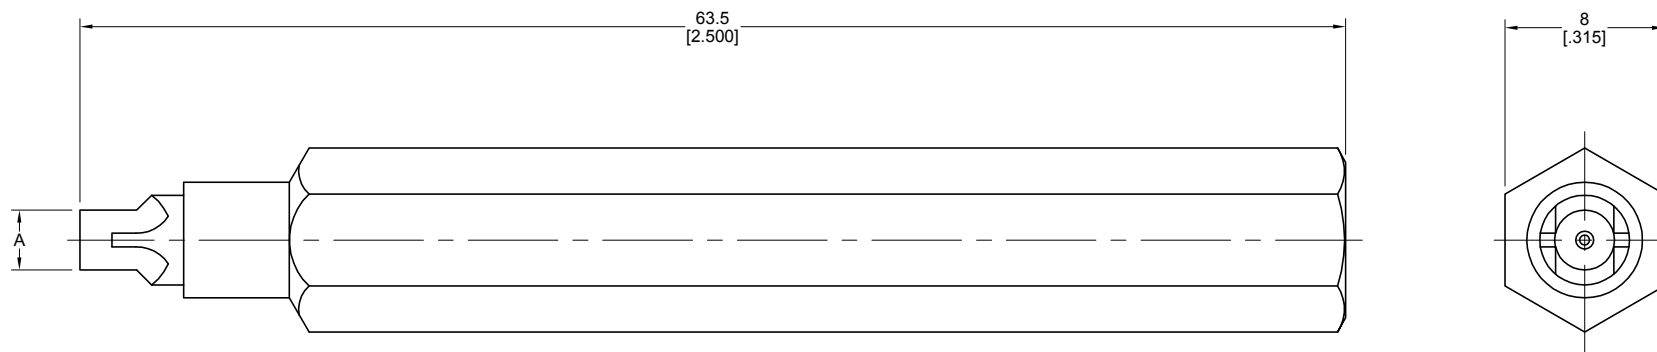

PART NO.	TYEP	ØA
T93002-1	FULL DETENT	(Ø2.85 [.112 DIA.])
T93002-2	LIMITED DETENT	(Ø2.95 [.116 DIA.])
T93002-3	SMOOTH BORE	(Ø3.05 [.120 DIA.])

DRAWN	P. CHEN	DATE	03/29/22
CHECKED	L. YANG	DATE	03/29/22
APPROVED	J. QU	DATE	03/29/22
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2022 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
X°	±1°		
X°	±2°		



TITLE  
INSTALLATION TOOL FOR SMP MALE THREAD-ON RECEPTACLE APPLICATIONS

VIEW	PART NO.	SHEET	REV.
	T93002	1/1	A
SIZE	SCALE		
A3	4:1		

4

3

2

1