


ELECTRICAL DATA:

- 1. IMPEDANCE: 50 Ω
- 2. FREQUENCY RANGE: DC-6GHz
- 3. VSWR: 1.30 MAX. AT DC-3 GHz
1.50 MAX. AT 3-6 GHz
- 4. INSERTION LOSS: 0.65DB MAX. AT DC-3 GHz
0.70B MAX. AT 3-6 GHz

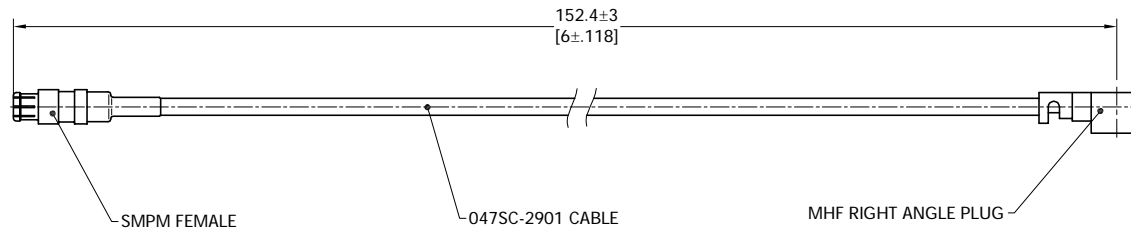

TITLE
CABLE ASSEMBLY, SMPM STRAIGHT FEMALE TO
MHF R/A PLUG, 047SC-2901 CBALE, 6 INCHES

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGED WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES
4. LENGTH TOLERANCE IS ±2%.

VIEW



PART NO.

TF047-SMPMF-MHF-6

SIZE
A3

SCALE
2.5:1

SHEET
1/1

REV.
A