


ELECTRICAL SPECIFICATIONS:

1. WORKING VOLTAGE: 800 VRMS
2. FREQUENCY RANGE: DC~1000 MHZ

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/11/16	J. QU

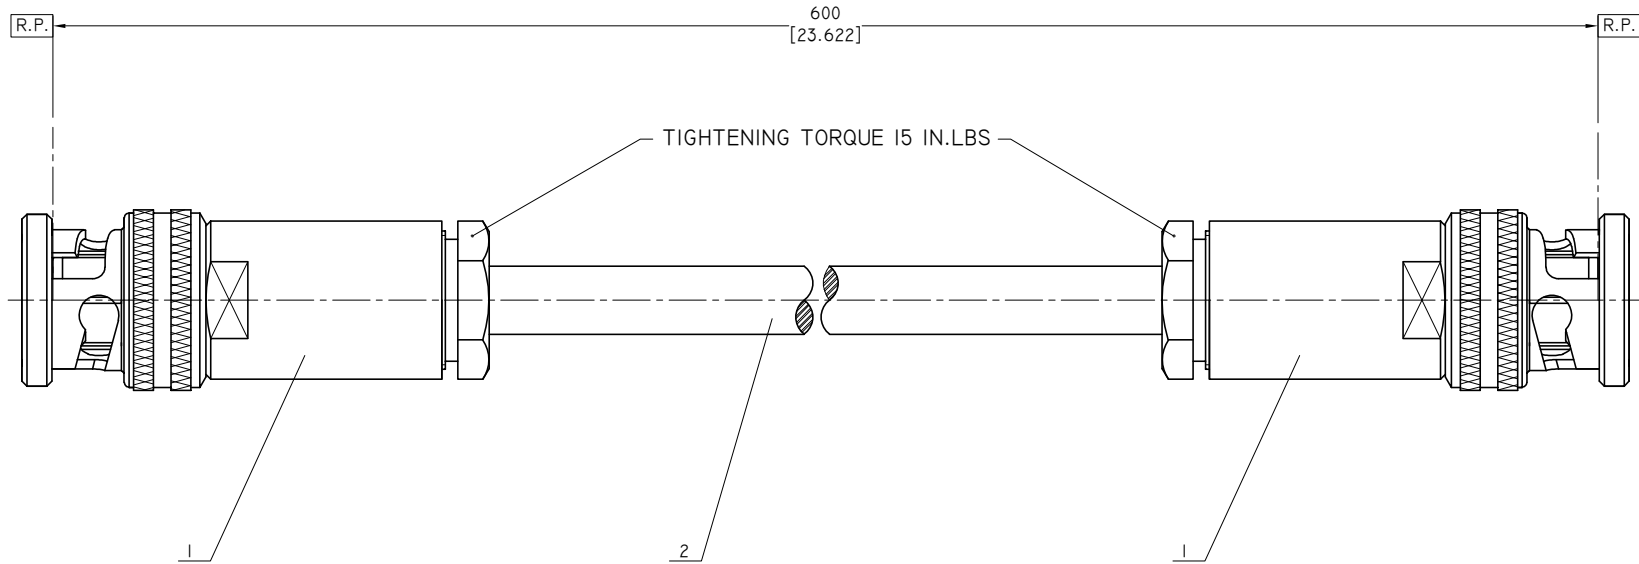

SEQUENCE NUMBER	PART NO.	DESCRIPTION	QTY
2	TRX316	TRX316 CABLE	1
1	ANO 4211-2010	TRB MALE CLAMP FOR TRX316 CABLE	2

DRAWN	P. CHEN	DATE	03/19/16
CHECKED	L. YANG	DATE	03/19/16
APPROVED	J. QU	DATE	03/19/16
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2016 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X°	±0.50 [.019"]		
X°	±1°		
X°	±2°		



TITLE
CABLE ASSEMBLY, TRB MALE TO TRB MALE, TRX316 CABLE, 0.6 METER

VIEW	PART NO.	SCALE	SHEET	REV.
	TRX316-TRBM-TRBM-600	2.5:1	1/1	A
SIZE	A3			