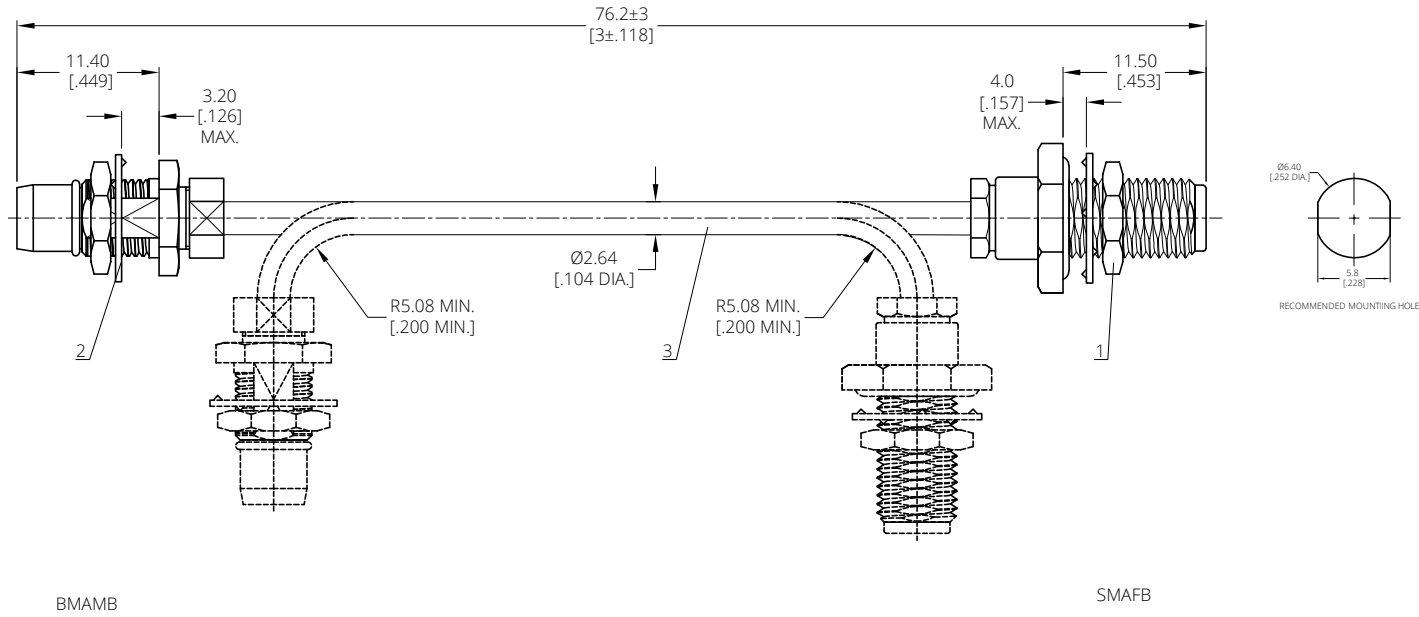



ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC-18 GHz
- 3 VSWR: 1.35 MAX.
- 4 INSERTION LOSS: 0.60 DB MAX.



MECHANICAL:

- MIN BEND RADIUS: 5.08MM[.020]
- MIN DYNAMIC RADIUS: 10.16MM[.040]



TITLE
CABLE ASSEMBLY, BMA STRAIGHT BULKHEAD MALE TO
SMA STRAIGHT FEMALE BULKHEAD, MB103 CABLE

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGED WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN MILLINETERS, DIMENSIONS IN [] ARE IN INCHES
4. LENGTH TOLERANCE IS ±1.5%.

VIEW	PART NO. mBend-BMA(M)B-SMAFB-3			
 	SIZE A3	SCALE 2.5:1	SHEET 1/1	REV. A