

4

3

2

1

MATERIAL & FINISH:

- 1 OUTER CONTACT: PHOSPHOR BRONZE, NICKEL PLATED
- 2 CENTER CONTACT: BRASS, GOLD PLATED
- 3 SOLDER FERRULE: BRASS, GOLD PLATED
- 4 COUPLING NUT: BRASS, NICKEL PLATED
- 5 INSULATOR: PTFE
- 6 WAVE WASHER: BERYLLIUM COPPER ALLOY, NICKEL PLATED
- 7 SPLIT WASHER: BRASS, NICKEL PLATED
- 8 GASKET: SILICONE RUBBER

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~4 GHz
- 3 VSWR: 1.30 MAX.

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55 °C~+165 °C
- 2 2011/65/EU (RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1999/45/EC (REACH): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/27/24	J Q

D

D

C


C

B

B

A

A

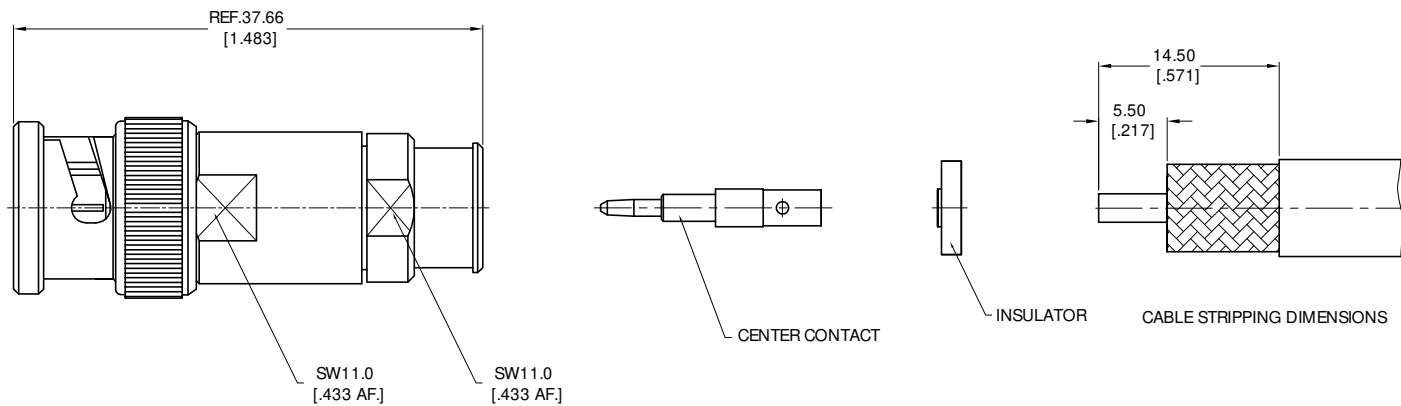

DRAWN	P. C	DATE	03/27/24
CHECKED	X. Y	DATE	03/27/24
APPROVED	J Q	DATE	03/27/24
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2024 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		

TITLE
BNC STRAIGHT MALE SOLDER FOR IW2801, PLEX310 CABLE

VIEW

PART NO. ANO 3111-2049			
SIZE A3	SCALE 2.5:1	SHEET 1/1	REV. A

4

3

2

1