

4 3 2 1

MATERIAL & FINISH:

- 1 BODY: BRASS, ALBALOY PLATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED & PHOSPHOR BRONZE, GOLD PLATED
- 3 INSULATOR: PTFE
- 4 COUPLING NUT: BRASS, ALBALOY PLATED
- 5 RADIATOR: ALUMINIUM, BLACK


ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1999/2006/EC(REACH): COMPLIANT

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: 4~8 GHz
- 3 VSWR: 1.25 MAX.
- 4 AVERAGE POWER: MAXIUM POWER 10 WATTS AVERAGE TO 25°C AMBIENT TEMPERATRUE, DERATED LINEARLY TO 1W @ 125°C
- 5 PEAK POWER: MAXIUM POWER 100 W (5μS PLUSE WIDTH WITH THE MAXIMUM 5% DUTY CYCLE)
- 6 ATTENUATOR ACCURACY: SEE TABLE

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/14/23	J Q

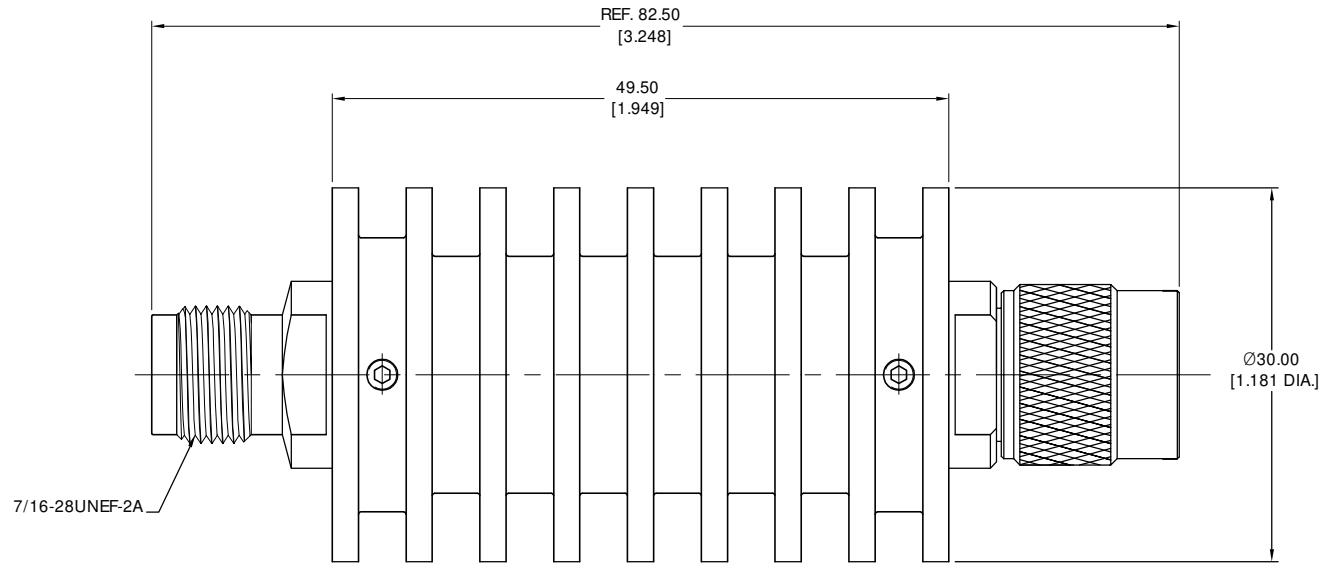

TABLE

PART NO.	ATTENUATION VALUES & ACCURACY			
	1~10 dB	20 dB	30 dB	40 dB
ANO 33-1002-XX	±0.5 dB	±0.6 dB	±0.8 dB	±0.8 dB

NOTE: XX REFER TO ATTENUATION VALUE IN dB

DRAWN	P. C	DATE	09/14/23
CHECKED	W. Y	DATE	09/14/23
APPROVED	J Q	DATE	09/14/23
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2023 ANOISON ELECTRONICS LTD	
	XX	±0.13 [.005"]	
	.X	±0.20 [.008"]	
	X	±0.50 [.019"]	
	.X°	±1°	
	X°	±2°	



TITLE			
ATTENUATOR, TNC MALE TO TNC FEMALE, 10W, 4-8GHZ			
VIEW		PART NO.	
		ANO 33-1002-XX	
SIZE	SCALE	SHEET	REV.
A3	2.5:1	1/1	A

4 3 2 1