MATERIAL & FINISH:

1 BODY: BRASS, NICKEL PLATED
2 CENTER CONTACT: PHOSPHOR BRONZE, GOLD PLATED
3 COUPLING NUT: BRASS, NICKEL PLATED
4 RETAINING RING: PHOSPHOR BRONZE, UNPLATED
5 CRIMP FERRULE: COPPER, NICKEL PLATED
6 INSULATOR: PTFE
7 GASKET: SILICONE RUBBER

ELECTRICAL DATA:

1 IMPEDANCE: 50 Ω
2 FREQUENCY RANGE: DC~6 GHz

ENVIRONMENTAL DATA:

1 TEMPERATURE RANGE: -55 ℃~+125 ℃
2 2011/65/EU (RoHS): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/12/08	J. QU
B	DRAWING FORMAT CHANGED	09/01/17	J. QU
C	1. 24.10 [.949] WAS 23.50 [.925] 2. INSULATOR ADDED 3. CABLE STRIPPING DIMENSIONS CHANGED	09/05/17	J. QU
D	Ø6.40 WAS Ø6.25, 5.50 HEX. WAS 5.40 HEX.	12/17/20	J. QU

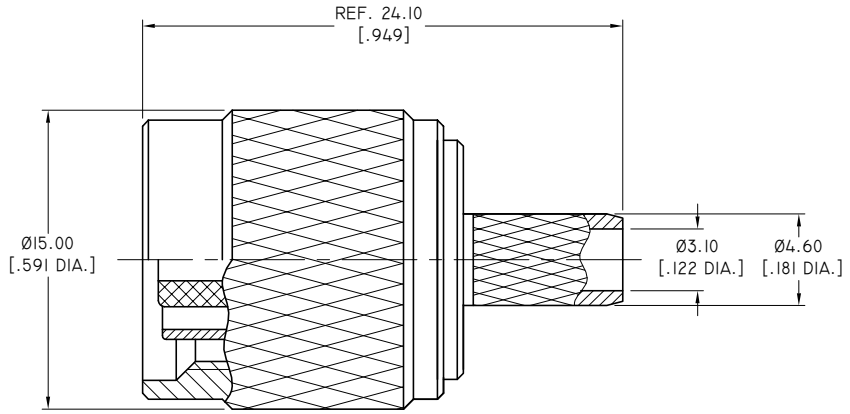

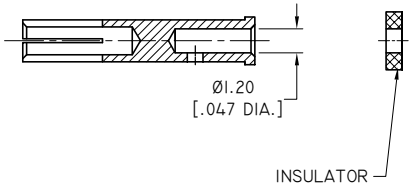

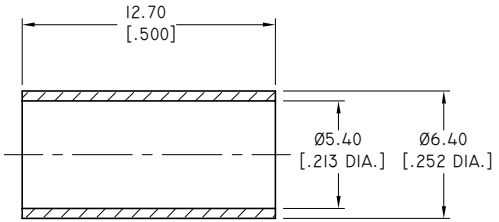

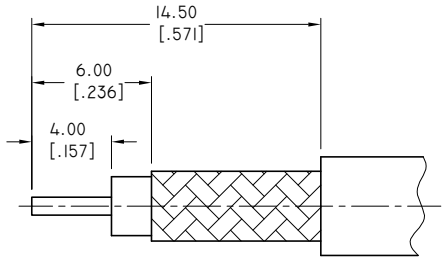

CABLE STRIPPING DIMENSIONS



CRIMP WIDTH: 10 [.394]

DRAWN	P. CHEN	DATE 12/17/20
CHECKED	L. YANG	DATE 12/17/20
APPROVED	J. QU	DATE 12/17/20

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

.XX	±0.13 [.005"]
.X	±0.20 [.008"]
X	±0.50 [.019"]
.X°	±1°
X°	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2020 ANOISON ELECTRONICS LTD

ANOISON

TITLE: RP TNC STRAIGHT MALE CRIMP FOR LMR200 CABLE

VIEW

PART NO. ANO 3313-2008

SIZE	SCALE	SHEET	REV.
A3	4:1	1/1	D