

4

3

2

1

## MATERIAL &amp; FINISH:

- 1 BODY: PHOSPHOR BRONZE, NICKEL PLATED
- 2 CENTER CONTACT: BRASS, SILVER PLATED
- 3 COUPLING NUT: BRASS, NICKEL PLATED
- 4 INSULATOR: PTFE
- 5 GASKET: MVQ(SILICONE RUBBER)



## ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~11 GHz
- 3 VSWR: ≤ 1.30 AT DC~3 GHz

## ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1999/45/EC(REACH): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/07/10	J. QU
B	1. 2015/863/(RoHS): COMPLIANT ADDED 2. 1999/45/EC(REACH): COMPLIANT ADDED	10/09/18	J. QU

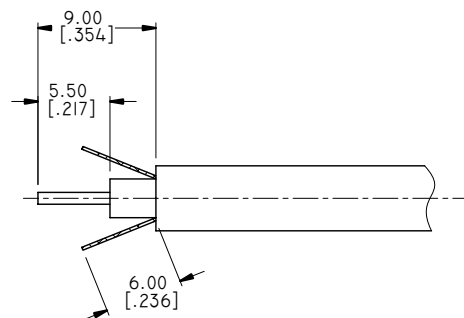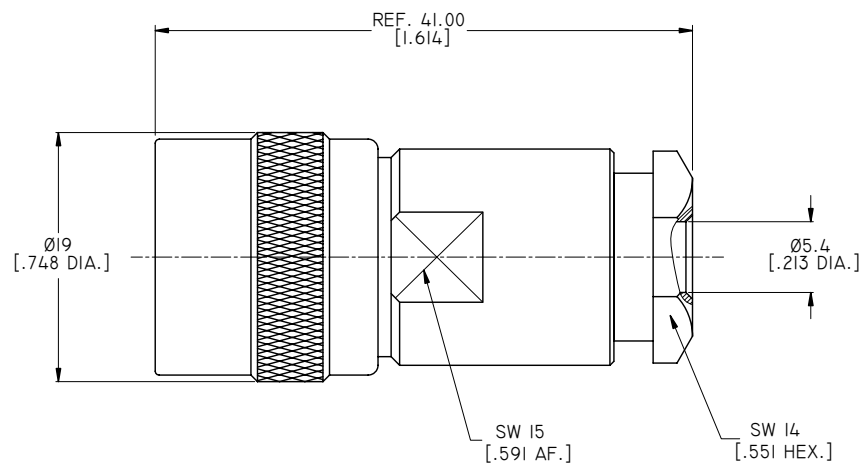

CABLE STRIPPING DIMENSIONS

DRAWN	P. CHEN	DATE	10/09/18
CHECKED	X. B. YANG	DATE	10/09/18
APPROVED	J. QU	DATE	10/09/18
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2018 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE  
C MALE CONNECTOR CLAMP/SOLDER ATTACHMENT FOR RG55, RG58, RG141, RG223, LMR195

VIEW



PART NO.

ANO 3411-2001

SIZE

A3

SCALE

2.5:1

SHEET

1/1

REV.

B

4

3

2

1